





INDUSTRY INNOVATOR IN PRODUCT DESIGN From Our Family To Yours



JR LIST PRESIDENT

JR Lit

List Industries Inc. was founded in 1936 by Max. H. List, my grandfather, with the notion that customer satisfaction and product quality would be the basis for success.

His philosophy has been carried on for more than 80 years, through the efforts of my father, Herb List. Today we have become the industry leader. Looking back on the 40 years that I have been with List Industries, serving now as the company's President, I am proud to say that my grandfather's ingredients for success have given me the solid foundation needed to lead List Industries into the future.

Our journey began 80 years ago, when the first locker rolled out of the door of my grandfather's



factory in Chicago, IL, and it continues today, with the thousands of lockers manufactured daily in our Deerfield Beach, Apopka and Gainesville Florida locations. We are proud to be recognized as the industry leader, and as such, we remain committed to providing the highest quality lockers.

While the rest of the industry continues to flatter us by following our lead, our team continues working on new products and innovations to make sure that, as innovator and industry leader in product design and development, List Industries remains

America's Most Complete Locker Line®.

Leading Innovation for over 80 years

Superior® Lockers, Cabinets, Shelving, & Gates, by List Industries Inc., are manufactured in our two modern, highly efficient, state-of-the-art facilities in Deerfield Beach and Apopka, Florida. We recently expanded capacity, making room for the installation of five million dollars' worth of computer-controlled fabricating, roll-forming and powder coat finishing systems to ensure consistent, quality workmanship.

Our top-of-the-line, automatic, numerically controlled, quick color change finishing system allows us to offer 24 standard designer powder coat applied colors with the highest quality and most durable paint finish in the industry.

From initial design to manufacture and finish, Superior[®] lockers are engineered using the most advanced computer technology to give you quality you can rely on.

The uniqueness of our Hollow-T framing system gives us the flexibility to custom design a locker to meet the specific requirements of your project. Our complete line of All-Star Sport Lockers offers you twelve standard



configurations per size, before adding options to further meet your needs All-Star Sport Lockers are the best steel sport locker available today. The addition of our Recruiter™ wood and Phenolic Lockers insures a locker to meet your specific facility needs

This catalog depicts just a few of the endless design possibilities when choosing Superior fully-framed lockers; it also includes other product lines, all manufactured to the same high standards you have come to expect. We welcome the opportunity to work directly with you to custom design a locker room environment that is productive and attractive while remaining time and cost efficient.

Our team of designers, engineers and sales professionals is available to assist you every step of the way, from initial budget planning to final project closeout.

List Industries, Inc. leads the way in quality and customer service. From our corporate headquarters in Deerfield Beach, our three manufacturing plants in Florida, six strategically located regional distribution centers, seven regional sales offices located throughout the United States and our network of more than 300 authorized distributors nationwide, we provide the quality you demand, the timeliness you require and the service you deserve.



All Superior metal and plastic lockers are Greenguard Gold Certified.

Greenguard is an indoor air quality certification program for low emitting products and materials that evaluates over 75,000 chemicals, including volatile organic compounds, carcinogens, and reproductive toxins. Referenced in both the Collaborative for High Performance Schools (CHPS) and the Leadership for



Energy and Environment Design (LEED) Building Rating System, Greenguard Gold Certification establishes strict chemical emission standards for products intended for use in environments where children and others work, play or reside.



GALVANITETM CORROSION RESISTANT SHEET STEEL

Ideal for use in high humidity areas, outdoor locations, near shower, pool areas and food industry facilities

GALVANITE™, is List Industries' trade marked name for lockers and cabinets manufactured with galvanneal sheet steel components and finished with an electrostatically applied high-grade powder coat finish. Galvanite and powder coat offer exceptional double protection against corrosion, even under the most adverse conditions. Tests indicate that galvanneal increases the estimated life cycle threefold.





What Is Galvanneal?

Galvanneal is the result of the combined processes of galvanizing (hot-dipped zinc coating) and annealing (heat treatment). Galvanneal does not flake off its galvanized coating when formed, stamped, and bent. The very fine matte finish acts like a primer that easily adheres to paint. These characteristics make galvannealed sheet steel ideal for steel lockers in high humidity, corrosion prone areas.

PAGE

COMMON COLD ROLLED SHEET STEEL

with a 1 mil dry film build paint thickness after a 336 hour salt spray test.



TABLE OF CONTENTS

PRODUCTS

LUDUCI9	PAGE
Fully-Framed All-Welded Production Lockers	4
Unibody All-Welded Production Lockers	26
Welded Cubbies	32
Knock-Down (KD) Production Lockers	34
Benches And Pedestals	46
Locks	47
Cubix Lockers	49
Backpack/Laptop lockers	50
Cell Phone lockers	51
Bulk Storage Lockers (BSL)	52
Parcel Lockers	54
Portable Gates	55
Wood Lockers	56
AquaMax™ HDPE Solid Plastic Lockers	62
VersaMax™ Phenolic Lockers	64
HiTech® Clip Shelving	66
DuraTech™ PassThru Shelving	
Rivetwell™ Boltless Shelving	72
400-800 Series KD Cabinets	80
DuraTough™ All Welded Cabinets	84
Color Options	
Quick-Ship Program	



Deerfield Beach, Florida Headquarters



FULLY-FRAMED ALL-WELDED LOCKERS

CONTINUOUS 16 GAUGE FLAT

TOP Optional slope top available

STANDARD SAFETY MINDED SELF-CLOSING TOP HINGED DOORS

Continuous hinge rods safely concealed. Standard on doors 12" high and under.

TWO TONE COLOR OPTION AT NO ADDITIONAL CHARGE



GALVANNEAL

shelves and bottom for added corrosion resistance.

1/2" MESH VENTILATED SIDES

13 gauge flattened expanded metal protected and fully-framed by our unique structured roll formed Hollow-T framing system. Fully framed solid sides are optional


FULL HEIGHT DOOR STIFFENER

Standard for all Doors 20" high and above that are over 15" wide and all marquis lockers. Available as an option on other doors.

14 GAUGE GALVANNEAL


channels both front and back provide corrosion resistance at locker bottom





WHAT A DIFFERENCE

Our 13 gauge 3-1/2" 7-Knuckle hinge vs the industry's standard 2" KD locker hinge



THE INDUSTRY'S, BEST LATCH

Our rugged 11 gauge MIG welded latch hook with large riveted bumper vs the industry common KD style latch

SUPERIOR HINGES

SUPERIOR LATCHES





14 gauge cold rolled horizontal channel base frame members run continuous across full width of multiple column unit at front and back.

SUPERIOR[®] fully-framed locker bottoms are a full 2-3/4" above finished floor eliminating the need for and additional base

- Structural roll formed 16 gauge Hollow-T tubular frame members run top to bottom at all four corners of each locker column.
- 2 16 gauge double channel horizontal frame members run front to back at top and bottom.
- 14 gauge galvanneal horizontal channel base frame members, front and back, run continuous across the full width of a multiple column locker unit. Channels are galvanneal for added corrosion resistance
- 16 gauge galvanneal bottom & intermediate shelves are corrosion resistant and locked into frame at all four corners and securely MIG welded.

- Heavy-duty 13 gauge 7 knuckle 3-1/2" hinges are the industry's strongest hinge
- 11 gauge MIG welded latch hooks with large rivetedon bumper, far exceeding industries standards
- 7 18 gauge solid back is continuous across multiple locker columns
- 13 gauge 1/2" diamond pattern, flattened expanded metal sides are enclosed on all four sides by the structural Hollow-T framing system
- 14 gauge doors are available in diamond perforated, solid, louvered or mini louvered





SUPERIOR® DESIGN AND ENGINEERING CREATE THE INDUSTRIES STRONGEST AND SAFEST LOCKER





ANGLE FRAME CONSTRUCTION WITH 3/4" EXPANDED METAL



CONSTRUCTION
WITH SIDE AND
FRAME OF ONE PIECE



CONSTRUCTION
WITH INDIVIDUAL
COMPONENTS

SUPERIOR'S UNIQUE STRUCTURAL HOLLOW-T SIDE PANEL FRAMES

are the strongest, safest and most rigid structure in the industry utilizing welded vertical Hollow-T framing members and horizontal channels to enclose expanded metal on all four sides. Superior's Hollow-T side panels have substantially more steel than all competitors.

SUPERIOR® FULLY-FRAMED LOCKER BOTTOM



LOCKER SIDES EXTEND TO FLOOR/ BASE FOR MAXIMUM STRENGHT AND STABILITY OF LOCKER INSTALLATION

COMPETITOR LOCKER BOTTOM



NO REINFORCEMENT!



SAFEMESH 84TM

THE INDUSTRY'S STRONGEST AND SAFEST EXPANDED METAL



COMPETITOR

3/4" MESH
13 GAUGE FLATTENED
EXPANDED METAL



SUPERIOR

1/2" MESH
13 GAUGE FLATTENED
EXPANDED METAL

STRENGTH: 84% more steel ensures a stronger more rigid unit than 3/4" mesh

SAFETY 1/2" mesh design keeps fingers out

SECURITY: Reduces risk of loss, theft and content damage



SUPERIOR® LOCKERS LOCK BARS ARE INSTALLED AFTER THE DOORS ARE PAINTED



SUPERIOR® LOCK CHANNEL

ROLL FORMED G90 HOT DIPPED GALVANIZED LOCK BARS


are installed after the doors are painted to ensure complete paint coverage, corrosion resistance and smoother lock bar operation. Others use standard steel and/or install the lock channel before paint trapping moisture in, preventing proper paint coverage leading to corrosion problems.

Dupont[®] Supertough[®] nylon latches are made in the USA and are installed after paint to insure a lifetime of superior performance. Use of lower quality plastics and/or installing before paint can cause brittlness and poor performance.

CUSTOMIZE TO MEET YOUR NEEDS

- ✓ No Costly Engineering
- ✓ No Added Lead-Time
- ✓ No Set-Up Charges
- ✓ No Problem!

Our unique Hollow-T framing system allows you to mix and match doors to create the perfect storage solution.

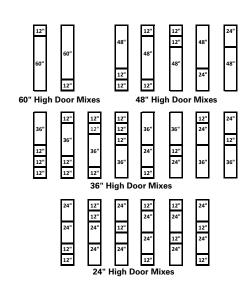





OUR MOST POPULAR CONFIGURATION
Shown here with optional 12" wide security box, stainless steel coat rod and foot locker/seat. Both security box sides are solid.



The All-Star sport locker's quality, functionality and durability raised the bar for sport lockers. All-Star lockers feature our exclusive Hollow-T framing system, with 1/2" 13 guage flattened expanded metal sides for maximum ventilation, safety and rigidity. Interlocking body components creates a functional yet sturdy sports locker, guaranteed to last a lifetime. The versatility of our Hollow-T framing system allows you to customize a locker to your specific requirements.

- All MIG welded construction
- Powder coated and baked body construction
- 16 gauge Hollow-T tubular sections & channel frame.
- 14 gauge cold rolled steel locker base
- 13 gauge cold rolled steel 1/2" flattened expanded metal vertical side panels .
- Standard hat shelf and 2 single prong wall hooks, 1 double prong ceiling hook.



All-Star Lockers feature
SafeMesh84TM, the industry's
strongest and safest expanded metal.



STANDARI See page 88 for color selections



Configurations Designed to Meet Your Locker Needs



Open top shelf with under hang hooks



Upper wallet security box with stainless steel coat rod



12" wide security box with stainless steel coat rod



Full width security box with stainless steel coat rod

Lower Options

Upper Options



A POPULAR CONFIGURATION

Shown here with full width security compartment, stainless steel coat rod and lower shelf/seat. Both security compartment sides are ventilated. See back cover for color selections.



Open lower



Reinforced seat



Foot locker with reinforced seat



Underside of foot locker seat is reinforced to support today's athlete

Additional Options



Shoulder pad rack





Shoulder pad rack with helmet support



2" or 3" Padded seat cushion

LOCKER SIZES

Widths 18", 24", 30", 33", 36" Depths 12", 16", 18", 22" Nominal Heights 60", 72", 84"

Note:

Actual locker column height is 2-3/4" over nominal column heights shown for 60" and 72" models. 84" high models will be 84" actual.

• All-Star lockers will ship in multiple column units up to 60" wide to meet individual jobsite conditions.

FEATURES

BODY CONSTRUCTION: All MIG welded construction.

FRAME: 16 gauge Hollow-T tubular sections running top-to-bottom at all 4 corners of each locker column. 16 gauge double channel run front to back at both the top and bottom of each locker side

VERTICAL SIDE PANELS: 13 gauge cold rolled steel 1/2" flattened expanded metal framed by Hollow-T tubular framing system.

LOCKER BASE: 14 gauge cold rolled steel channel running full width of welded locker unit at both front and back

OPTIONAL LOWER SEAT/SHELF: Shall be 16 gauge 1" with a reinforcing bar welded to lower front for ridgity.

OPTIONAL FOOT LOCKER: 14 gauge cold rolled steel with Security-Plus ventilation, seat opens for storage.

STANDARD: hat shelf and two single prong wall hooks, one double prong ceiling hook.





ATHLETIC TEAM FULLY-FRAMED ALL-WELDED LOCKERS



VARSITY SINGLE TIER

Highly recommended for varsity team rooms, engineered to withstand extreme abuse.

> JR. VARSITY **DOUBLE TIER**

Ideal when budget and/or space are limited. Double tier lockers can be used in team rooms as well as in P.E. rooms.



INTRAMURAL TRIPLE TIER

Ideal when space and/or funds are limited. The opening height allows clothing to hang on hooks allowing better ventilation.



STANDARD ATHLETIC TEAM FULLY-FRAMED ALL-WELDED LOCKERS

VARSITY SINGLE TIER

Widths: 9", 12", 15", 18", 24" Depths: 12", 16", 18", 22"

Opening Heights 36", 48", 60", 72" Nominal Column Heights: 36", 48", 60", 72"

JR VARSITY DOUBLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Opening Heights 24", 30", 36" Nominal Column Heights 48", 60", 72"

INTRAMURAL TRIPLE TIER

Widths 9", 12", 15", 18", 24" Depths 12", 16", 18", 22" Opening Heights 20", 24" Nominal Column Heights 60", 72"

- Actual locker column height for fully-framed all-welded only, is 2-3/4"over nominal column heights shown
- All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions
- 18" & 24" Wide All-Welded Lockers are only available in Premier Series (include full height door stiffener)



ATHLETIC TEAM FULLY-FRAMED ALL-WELDED LOCKERS

PREMIER SERIES TEAM LOCKERS



STANDARD DOOR STIFFENER FOR 18" AND 24" WIDE

STANDARD



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching

STANDARD



Our rugged 11 gauge MIG welded latch hook with large riveted on bumper vs. common K.D. locker style latch hook

STANDARD





Our heavy-duty 13 gauge 7-knuckle 3-1/2" hinge vs. common 2" K.D. locker style hinge





3-POINT HIGH SECURITY TURN HANDLE

is available for Varsity, Jr. Varsity and Intramural Team lockers. Not available in 9" wide lockers.

PREMIER SERIES TEAM LOCKERS

Include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Premier Series Team locker doors and optional 12" wide Premier Series turn-handle style doors.

FEATURES

BODY CONSTRUCTION: Fully-framed all-welded Hollow-T construction, 13 gauge 1/2" fully-framed flattened expanded metal sides, 16 gauge continuous top, 18 gauge solid back, 16 gauge galvanneal bottom

DOORS: 14 gauge diamond perforated doors are standard. Plain, louvered and Security-Plus door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle. Optional projecting 3-point turn-handle is available.

LATCHING: 11 gauge latch hooks with riveted on bumper MIG welded to Hollow-T frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" hinges:

- 3-hinges per opening 48" high and higher
- 2-hinges per opening 20" high thru 36" high

SHELVES: 16 gauge galvanneal hat shelf for Varsity openings 60" and 72" high, 16 gauge galvanneal intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See size chart on Page 10









A Coaches Dream Locker Room

Heavy gauge, fully-framed, all-welded construction combined with modern features and the Hollow-T design flexibility let you transform your locker room into an accessible environment, maximizing space and improving supervision without sacrificing

aesthetic appeal. Innovative solutions, like our Gym Class 9E and Gym Class 8D locker configurations, are the result of partnering and listening to coaches and P.E. instructors for more than 80 years.

Shown with optional padlock strike plates

Doors 12" high and under are standard with top hinge. Side hinge doors are available as an option





Choose From Unlimited Combinations to Meet Your Specific Locker Needs

Widths for all gym locker openings 12", 15", 18" Depths for all gym locker openings 12", 16", 18", 22"

	TIER	OPENING HEIGHTS	NOMINAL COLUMN HEIGHTS
4 TIER TO 9	Four Tier Five Tier Six Tier Seven Tier Eight Tier Nine Tier	8", 9", 12", 15", 18" 12", (4) 15" & (1) 12" 8", 10", 12" (6) 10" & (1) 12" 8", 9"	32", 36", 48", 60", 72" 60", 72" 48", 60", 72" 72" 64", 72"



Upgrade to Premier Series P.E. lockers which include a 3" wide 18 gauge full height door stiffener and are side hinged

OPTIONAL:



Seamless 304 stainless steel recessed handle is available. Doors will be side hinged and will use our Marquis style single-point thru-the-handle latching

STANDARD



Projecting spring loaded latch is standard on top hinged gym doors only



Top hinged doors with concealed hinge rod are standard for 12" high and under

STANDARD



Single-point thru-the-door projecting finger pull handle with padlock hasp is standard for side hinged doors



Side hinged doors are standard for 15" and 18" high, optional for doors 12" high and under

GOLD GERTIFIED

FEATURES

BODY CONSTRUCTION: Fully-framed all-welded Hollow-T construction, 13 gauge 1/2" fully-framed flattened expanded metal sides, 16 gauge continuous top, 18 gauge solid back, 16 gauge galvanneal bottom

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Security-Plus and plain door styles are available. Doors 12" high and under are standard with top hinge. Doors 15" and 18" high are standard with side hinge.

HANDLE/LATCHING: Top hinge doors have a projecting spring loaded heavy-duty latch/handle with integral padlock lug. **Side hinge** doors have a single-point thru-the-door projecting finger pull handle with padlock hasp. Optional deep-drawn seamless stainless steel recessed handle is available for side hinged gym doors (10" high and higher) and will utilize our Marquis style thru-the-handle single-point no moving parts latching and include two 13 gauge 7-knuckle 3-1/2" hinges

HINGES: Top hinge doors use a concealed 3/16" continuous rod. Side hinge doors use two heavy-duty 13 gauge 7-knuckle 3-1/2" hinges. Optional side hinged doors 8" and 9" high will have special hinges

HOOKS: None

SHELVES: 16 gauge galvanneal intermediate shelves







A Cost Effective Game Changer MAXIMIZE SPACE WITH THE 9E UNIT (6:1 RATIO)

This unit is a favorite among architects, coaches and physical education instructors. Superior Class 9E lockers accommodate 12 students in a compact three linear feet of space, replacing the typical "626" combination with the

popular 6:1 Ratio. Lockers where PE clothing is stored are a full 18" wide x 8" high. Wardrobe lockers for hanging school clothing are 9" wide x 48" high. Standard Class 9E unit size is 36-3/8" wide x (12", 16", 18", 22") deep x 74-3/4" high actual.

No. 9E (6:1 Ratio)

Doors are shown with optional padlock strike plates which protect finish from being marred by padlock.

THE EFFICENT 8D



THE EFFICENT 8D UNIT (5:1 RATIO)

Superior Class 8D lockers are designed with the same premise as its big brother, the Class 9E. We have engineered the finest 5:1 ratio P.E. unit in the locker industry utilizing the same floor space as a standard "525" configuration. This locker is a nominal 64" high (66-3/4" actual

height) as opposed to 60". The Class 9E lockers are 18" wide x 8" high and the wardrobe lockers are 9" wide x 48" high. Standard Class 8D unit size is 36-3/8" wide x (12", 16", 18", 22") deep x 66-3/4" high actual

Typical Locker VS. Superior 9E & 8D Lockers

No. 8D (5:1 Ratio)



12" wide x 12" high



18" wide x 8" high


- Maximizes ventilation for clothing and shoes
- Increases shelf space by 50%
- Adds 12" in height to wardrobe opening
- One gym locker at unit bottom in lieu of two
- 3 latch points & 3 hinges per wardrobe door instead of 2



No.61-(6:1)

No.626-(6:1)

No.9E-(6:1)

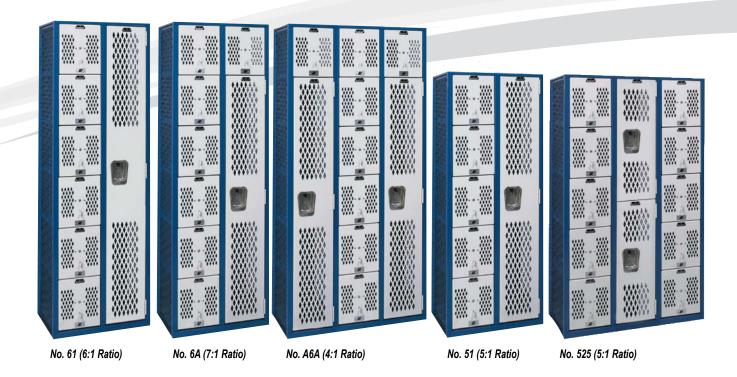


The design flexibility of our all-welded athletic lockers allows us to mix and match wardrobe lockers with box lockers to meet any configuration and/or ratio your facility may demand. Please feel free to contact our Sales Manager at 1-800-776-1342. He will help you create an environment which will be both esthetically pleasing and functional. No.31-(3:1) No.41-(4:1) No.A6A-(4:1) No.51-(4:1) No.525-(5:1) No.8D-(5:1) No.62-(3:1) No.82-(4:1)

No.6A-(7:1)

No.5B-(7:1)

TYPICAL SUPERIOR P.E. LOCKER COMBINATIONS



No.5C-(8:1)






ALL-WELDED FULLY-FRAMED ATHLETIC LOCKERS

MARQUIS CHAMPION LOCKERS

With more than 30 years of experience manufacturing single-point lockers, Superior Marquis Champion lockers are manufactured to the industry's highest standards by incorporating our Hollow-T framing system, interlocking body

components, maintenance-free single-point latching mechanism, reinforced doors and the industry's strongest hinges to deliver a lifetime of satisfaction.

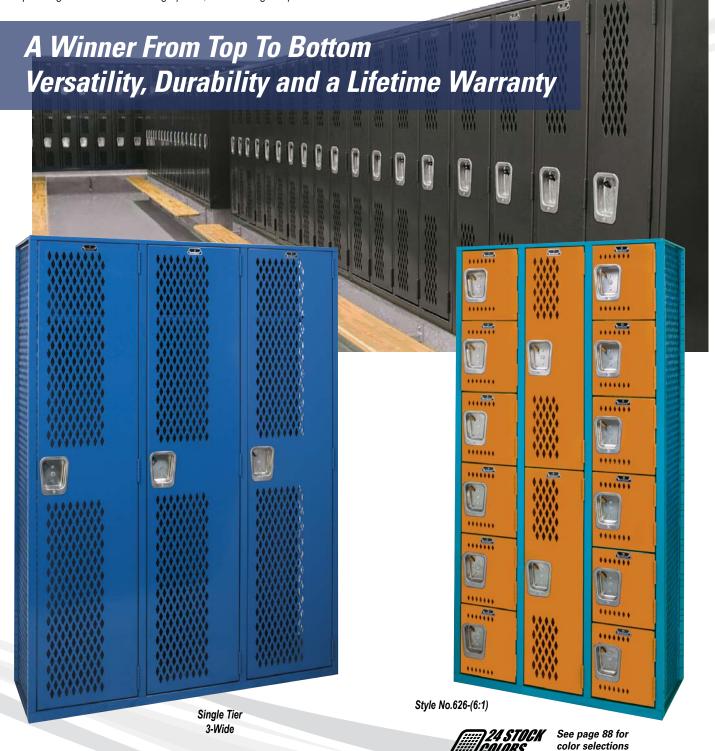



ALL-WELDED FULLY-FRAMED ATHLETIC LOCKERS

This is the most rugged athletic locker available today.



STANDARD



Deep-drawn 304 stainless steel recessed handle with single-point latching

STANDARD



11 gauge single-point latch MIG welded to Hollow-T frame

STANDARD





Heavy-duty 13 gauge 7-knuckle 3-1/2" hinge vs. a common 2" K.D. locker style hinge

MARQUIS CHAMPION STANDARD - DOOR STIFFENER

Includes a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Marquis doors.

MAROUIS CLASSIC DOOR

MARQUIS CLASSIC DOOR LINER

18 guage full width door liner covers back of recessed handle. Built-in lock attaches to both door liner and recessed handle for maximum security and rigidy.



FEATURES

BODY CONSTRUCTION: Fully-framed all-welded Hollow-T construction, 13 gauge 1/2" fully-framed flattened expanded metal sides, 16 gauge continuous top, 18 gauge solid back, 16 gauge galvanneal bottom

DOORS: 14 gauge diamond perforated doors with a full height 3" wide 18 gauge door stiffener are standard. Plain, louvered and Security-Plus door styles are available. All doors are side hinged

HANDLE: Deep-drawn single-point seamless stainless steel recessed handle

LATCHING: Single-point maintenance-free quiet latching with 11 gauge MIG welded latch with pry resistant lug

HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" hinges:

- 3-hinges per opening 48" high and higher
- 2-hinges per opening 36" high and under

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher. No hooks for openings 18" high and under

SHELVES: 16 gauge galvanneal hat shelf for single tier openings 60" and 72" high, 16 gauge galvanneal intermediate shelves







GRADUATE CORRIDOR LOCKERS

With the addition of solid sides and louvered doors, the industry's best athletic locker is perfect for corridor applications when maximum strength, durability and longevity are important. Graduate lockers include our lifetime warranty, which is standard on all fully-framed all-welded lockers.

The use of our exclusive Hollow-T framing system together with galvanneal bottom, intermediate and hat shelves (where applicable) achieves a degree of excellence previously reserved for high abuse athletic room. Upgrade to our Graduate Premier and you get our full height door stiffener creating a rigid torque-free door.





See back cover for color selections



GRADUATE CORRIDOR LOCKERS



STANDARD



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching

STANDARD



11 gauge latch hooks with riveted on bumper MIG welded to Hollow-T frame

STANDARD





Heavy-duty 13 gauge 7-knuckle 3-1/2" hinge vs. a common 2" K.D. locker style hinge



PREMIER SERIES GRADUATE LOCKERS include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Premier Series doors. 18" and 24" wide doors are only available in Premier Series.



FEATURES

BODY CONSTRUCTION: Fully-framed all-welded Hollow-T construction, 18 gauge fully-framed solid sides, 16 gauge continuous top, 18 gauge solid back, 16 gauge galvanneal bottom

DOORS: 14 gauge louvered doors are standard Plain, Security-Plus, Safety-View and diamond perforated door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

LATCHING: 11 gauge latch hooks with riveted on bumper MIG welded to Hollow-T frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" hinges:

- 3-hinges per opening 48" high and higher
- 2-hinges per opening 20" high thru 36" high

SHELVES: 16 gauge galvanneal hat shelf for single tier openings 60" and 72" high, galvanneal intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher







MARQUIS® PROTECTOR

This is the most durable and quiet corridor locker in the industry, constructed using our fully-framed, all-welded Hollow-T framing system.

If you are looking for quiet, maintenance-free corridor lockers to last the life of your facility, our Marquis[®] Protector is your best choice, backed up in writing by our lifetime warranty.





See back cover for color selections



MARQUIS® PROTECTOR



STANDARD



Deep-drawn 304 stainless steel recessed handle with single-point latching

STANDARD



11 gauge single-point latch MIG welded to Hollow-T frame

STANDARD





Heavy-duty 13 gauge 7-knuckle 3-1/2" hinge vs. a common 2" K.D. locker style hinge

STANDARD



Include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Marquis doors.

MARQUIS CLASSIC DOOR LINER

18 guage full width door liner covers back of recessed handle. Built-in lock attaches to both door liner and recessed handle for maximum security and rigidy.



FEATURES

BODY CONSTRUCTION: Fully-framed all-welded Hollow-T construction, 18 gauge fully-framed solid sides, 16 gauge continuous top, 18 gauge solid back, 16 gauge galvanneal bottom

DOORS: 14 gauge plain doors with a full height 3" wide 18 gauge door stiffener are standard. Louvered, Security-Plus and diamond perforated door styles are optional

3-Wide

HANDLE: Deep-drawn seamless stainless steel recessed handle

LATCHING: Single-point maintenance-free quiet latching with 11 gauge MIG welded latch

HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" hinges:

- 3-hinges per opening 48" high and higher
- 2-hinges per opening 20" high thru 36" high

SHELVES: 16 gauge galvanneal hat shelf for single tier openings 60" and 72" high, 16 gauge galvanneal intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher





FULLY-FRAMED ALL-WELDED LOCKERS

MILITARY GRADE TA-50

Manufactured with top quality steel and built to strict specifications, our TA-50 Military Grade Locker is the solution to all your storage challenges.

Secure, durable and guaranteed to last a lifetime.







FULLY-FRAMED ALL-WELDED LOCKERS

MILITARY GRADE TA-50







STANDARD



Rugged 3/16" Steel Handle is prepared for use with a padlock. Doors are pre-punched to accommodate a built-in combination or key lock if desired

STANDARD



Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges. Handle: 3-point turn-handle latching with 3/8" diameter locking rods for maximum security





TA-50 GEAR LOCKER AVAILABLE SIZES

Widths: 36-1/2", 42-3/8", 48-1/4"

Depths: 18", 22", 24" Heights: 74-3/4", 78", 84"

FEATURES

BODY CONSTRUCTION: Fully-framed all-welded construction, 13 gauge 1/2" fully-framed flattened expanded metal sides, 16 gauge top, 18 gauge solid back and 16 gauge galvanneal bottom. Optional solid sides are available.

DOORS: 14 gauge diamond perforated doors with 18 gauge full-height door stiffener for both doors is standard. Louvered, Security-Plus and plain door styles are available

HANDLE: 3-point turn-handle latching

SHELVES: 16 gauge galvanneal upper shelf located 12" down from top, 16 gauge galvanneal lower shelf located 18" up from bottom and 16 gauge galvanneal bottom shelf

DOOR HINGES: Heavy-duty 13 gauge 7-knuckle 3-1/2" hinges

ACCESSORIES: Stainless steel coat rod located under upper shelf.









TURN OUT GEAR FIREFIGHTER LOCKERS



- ✓ Fully-framed, all welded, rugged construction.
- ✓ Maximum ventilation with expanded metal sides.
- ✓ Upper shelf provides storage for helmets and head gear.
- ✓ Without base models include ventilated bottom.
- **✓** Open-front provides quick access to gear and clothing.
- **✓** 721 Relay Red hammertone textured powder coat finish.



Optional Security Box uses Two heavy-duty 13 gauge 7-knuckle 3-1/2" hinges and a finger pull padlock hasp



Fixed hat shelf and stainless steel coatrod with 2 single prong hooks



Models with base are designed to be installed on the floor



Models without base have ventilated bottom plate and are designed to be installed on the wall with the wall mounting angle



GENERAL SPECIFICATIONS

BODY CONSTRUCTION: Fully-framed all-welded Hollow-T construction, 13 gauge 1/2" fully-framed flattened expanded metal sides, 18 gauge solid back, 16 gauge galvanneal bottom.

DOORS (OPTIONAL): 14 gauge galvanneal steel. Security box door is solid. Full-height door is diamond perforated and includes 18 gauge door stiffener.

HANDLE/LATCHING: Optional security box has friction catch, finger pull. Optional full-height door has gravity lift-type multipoint spring loaded latching and stainless steel recessed handle. Optional foot locker is prepared for padlocks only.

HINGES: Optional doors have heavy-duty 13 gauge 7-knuckle 3 1/2" hinges.

SHELVES: Two upper 16 gauge galvanneal steel shelves are standard.

HOOKS/COAT ROD: Four single prong hooks and stainless steel coat rod are standard.













Perfect for SWAT, Police, Fire & First Responders



TASK FORCE XP



Provides the perfect solution for the storage needs of emergency response teams.

- **√** Utility belt hook
- **✓** Security box
- One side pocket shelf for a 1" thick clipboard
- ✓ Full height piano hinge
- Finish is standard powder-coat
- ✓ Full height door stiffeners
- ✓ Lower storage area with pull-out drawer
- Auto-Locking drawer is activated by upper doors
- ✓ Electrical Knockout in locker top - outlet and wiring by others



Standard electrical knockout at locker top right rear corner

OPTIONS

- PEGBOARD DOOR STIFFENER
- BOOT TRAY
- BODY ARMOR DRYING RACK
- PERSONAL ITEMS ACCESSORY TRAY
- LOUVERED DRAWER FRONT
- PERFORATED TOP
- AIRFLOW GAP
- SHELVES SPACED AWAY FROM BACK FOR ADDED AIRFLOW



Available with and without base storage compartment and seat

STANDARD UPPER UNIT SIZES

Widths: 24", 30", 36" Depths: 18", 24" Height: 72"

STANDARD BASE UNIT SIZES

Widths: 24", 30", 36" Depths: 30" 36" Height: 18"

FEATURES

BODY CONSTRUCTION: 16 gauge, Unibody all-welded, sides, galvanneal corrosion resistant sheet steel.

BACK: 18 gauge.

BODY STYLES: Single tier, custom design for specialized use.

FEATURES: Security box (9" x 12") with keyed lock.

DOOR: 14 gauge louvered double doors with full-height welded in stiffener.

HINGES: Continuous piano type.

HANDLE: 3/16" Steel handle with high security 3-point turn handle latching and 3/8" diameter steel locking rods.

HOOKS: Two single wall hooks in wardrobe area plus single hook for opening below security box.

COAT RODS: One at vertical wardrobe section.

SHELVES: Two full-width at top, one partial shelf above security box.







WHAT IS UNIBODY ALL-WELDED?

- Superior unibody all-welded corridor lockers include our double vertical frame design adding strength, integrity, durability and visual appeal.
- First we start with prime grade cold rolled sheet steel. 16 gauge for all body components except backs which are 18 gauge. Doors are heavy 14 gauge.
- Sides are formed to be an integral part of the front vertical locker frame which locks into the bottom for precise alignment and added strength.
- We MIG weld an additional channel shaped vertical frame member between doors providing a continuous door strike at both the hinge and latch side of the door.
- The top and bottom are flanged downward at the front to form a 1-1/2" high channel shaped top and bottom horizontal frame member continuous across the multiple column unit up to 60" wide.
- The base is a full 1-1/2" high keeping locker contents away from moisture on the floor and/or wood/concrete base.
- Front-to-back channel stiffeners are welded into the base under each side panel providing a strong anchor bearing surface for installation and increasing overall unit strength.
- Horizontal tier dividers for double and triple tier models project through to the face of the locker forming a horizontal cross member between doors for maximum strength.
- Guaranteed in writing by our lifetime warranty.

THE CLASSMATE ™ CORRIDOR LOCKERS

Our unique double frame, unibody all-welded design provides a durable locker with a classic appearance that is backed by our life-time warranty.





INTEGRAL SLOPE TOP is fabricated of heavy 16 gauge steel, runs continuous across a multiple column unit and is MIG welded at the factory replacing welded locker unit flat top. Sides are sloped at top providing rigid support beneath the slope top between each locker column.



PREMIER SERIES CLASSMATE which includes a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torquefree door. A 1-1/2" wide stiffener will be furnished for 9" wide Premier doors. 18" and 24" all-welded lockers are only available in Premier Series.





CLASSMATE ™ **Z-STYLE**

The new Z-Tier Unibody lockers creates a unique multi-height storage with extended hanging space on one side and built in shelf on the other, its like a two tier with the space of a single tier.



STANDARD



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching

STANDARD



12 gauge latch hooks MIG welded to frame.




16 gauge continuous

STANDARD



piano hinge

FEATURES



DOORS: 14 gauge louvered doors are standard. Plain, Security-Plus, Safety-View and diamond perforated door styles are optional

HANDLE: Deep-drawn 304 seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

HINGES: 16 gauge continuous piano type

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier 1-double
- 1-double & 1- single hook for 9" wide openings 30" and higher

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves.







MARQUIS® BOOKSAFE® III CORRIDOR LOCKERS

Our third generation Marquis Booksafe locker includes reinforced double frame, unibody construction and a modern seamless deep-drawn stainless steel recessed handle. The industry's first and best single-point, all-welded corridor locker just got better, stronger and more durable, and backed by our written lifetime warranty. Doors are provided without louvers for a clean flush front.



WHAT IS UNIBODY ALL-WELDED?

- Superior unibody all-welded corridor lockers include our double vertical frame design adding strength, integrity, durability and visual appeal.
- First we start with prime grade cold rolled sheet steel. 16 gauge for all body components except backs which are 18 gauge. Doors are heavy 14 gauge.
- Sides are formed to be an integral part of the front vertical locker frame which locks into the bottom for precise alignment and added strength.
- We MIG weld an additional channel shaped vertical frame member between doors providing a continuous door strike at both the hinge and latch side of the door.

- The top and bottom are flanged downward at the front to form a 1-1/2" high channel shaped top and bottom horizontal frame member continuous across the multiple column unit up to 60" wide.
- The base is a full 1-1/2" high keeping locker contents away from moisture on the floor and/or wood/concrete base.
- Front-to-back channel stiffeners are welded into the base under each side panel providing a strong anchor bearing surface for installation and increasing overall unit strength.
- Horizontal tier dividers for double and triple tier models project through to the face of the locker forming a horizontal cross member between doors for maximum strength.
- · Guaranteed in writing by our lifetime warranty.



MARQUIS® BOOKSAFE® III CORRIDOR LOCKERS





INTEGRAL SLOPE TOP is fabricated of heavy 16 gauge steel, runs continuous across a multiple column unit and is MIG welded at the factory replacing welded locker unit flat top. Sides are sloped at top providing rigid support beneath the slope top between each locker column.

STANDARD



Deep-drawn 304 stainless steel recessed handle with single-point latching

STANDARD



11 gauge single-point latch MIG welded to Hollow-T frame

STANDARD



16 gauge continuous piano hinge

STANDARD



Include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Marquis doors.

MAPONIC OLASCIO DOOD

MARQUIS CLASSIC DOOR LINER

18 guage full width door liner covers back of recessed handle. Built-in lock attaches to both door liner and recessed handle for maximum security and rigidy.



FEATURES

BODY CONSTRUCTION: All-welded unibody construction, 16 gauge solid sides integral with frame, 16 gauge continuous top, 18 gauge solid back, 16 gauge bottom

DOORS: 14 gauge plain doors with a 3" wide 18 gauge full height door stiffener are standard. Louvered, Security-Plus and diamond perforated door styles are optional

HANDLE: Deep-drawn seamless stainless steel recessed handle with single-point latching

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free quiet latching with 11 gauge MIG welded latch

HINGES: 16 gauge continuous piano type is standard. Heavy-duty 13 gauge 3-1/2" 7 knuckle hinges are available as an upgarde

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier 1-double
- 1-double & 1- single hook for 9" wide openings 30" and higher

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves.






UNIBODY ALL-WELDED LOCKERS



The Superior® Cubbie Locker line is designed for early childhood and elementary school classrooms. The Unibody, all-welded locker construction and the added safety features exceed the

requirements of this specialized market. Our line offers four models designed to meet any child's personal storage needs. Superior® Cubbies are backed by our written lifetime warranty.

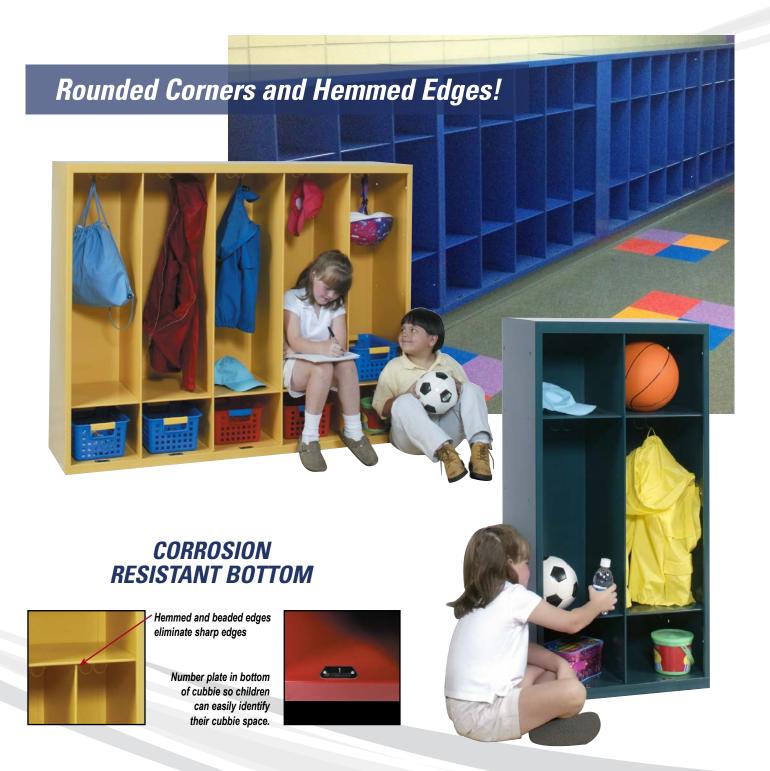

by List Industries Inc.

4 MODELS & 24 COLORS







MODEL SIZES	WIDTH	DEPTH	HEIGHT
Primary Cubbie	12", 15"	12", 16"	48"
Primary II Cubbie	12", 15"	12", 16"	48"
Primary Jr. Cubbie	12", 15"	12", 16"	24"
Backpack Cubbie	15", 18"	12", 16"	48"

FEATURES

BODY CONSTRUCTION: Unibody all-welded 16 gauge steel construction, backs are 18 gauge, bottom is galvanneal sheet steel for maximum corrosion resistance, hemmed and beaded edges are safe to the touch.

BODY STYLES: Open design, 4 body styles.

SHELVES: 16 gauge welded to body for added rigidity with a beaded leading edge for added safety.

NOTES: Easily secures to wall and floor for added safety, low installation costs, reduced installation time, low maintenance, low life-cycle cost, lifetime warranty, insect and termite proof. All welded cubbies will ship in multiple column units up to 60" wide to meet individual jobsite conditions.







CLASSIC KD WARDROBE LOCKERS



STANDAR	STANDARD KD WARDROBE LOCKER SIZES			
TIER	WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT
Single Tier Double Tier Triple Tier	9" 12" 15" 18" 24" 9" 12" 15" 18" 9" 12" 15"	12" 15" 18" 21" 24" 12" 15" 18" 21" 24" 12" 15" 18" 21" 24"	36" 48" 60" 72" 30" 36" 20" 24"	36" 48" 60" 72" 60" 72" 60" 72"





FEATURES

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 16 gauge louvered doors, 18 gauge for 9" wide are standard. Security-Plus, Safety-View and diamond perforated door styles are available. See Standard Quiet lockers on page 38 for plain door option

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier 1-double
- 1-double & 1- single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified



CLASSIC KD BOX LOCKERS

Box Lockers are Ideal Where Space is a Premium







Six Tier

Four Tier

STANDARD KD BOX LOCKER SIZES

WIDTH

12" 15"

12" 15"

12" 15"

Five Tier

DEPTH

12" 15" 18"

12" 15" 18"

12" 15" 18"

STANDARD



Box door single-point thru-the-door finger pull padlock hasp (shown with optional Padlock Strike Plate)

STANDARD



12 gauge latch hook is welded to frame

STANDARD



16 gauge continuous piano hinge



STRIKE PLATE Padlock Strike Plates for box doors protect finish from being marred by padlock



UPGRADE all body components to 16 gauge with 18 gauge back. Recommended when placing heavy items in lockers such as backpacks.



FEATURES

TIER

Four Tier

Five Tier

Six Tier

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 18 gauge louvered doors are standard. Plain, Security-Plus and diamond perforated door styles are available

FRAME: 16 gauge frame

HANDLE: Projecting finger pull

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

OPENING HEIGHT

15" 18"

12"

12" 14.4"

LATCHING: Single-point thru-the-door finger pull padlock hasp

HINGES: 16 gauge continuous piano type

FRAME HEIGHT

60" 72"

60" 72"

72"

NOTES: All production KD lockers are supplied without legs unless otherwise specified.

HOOKS: None





SPECIALITY KD WARDROBE & BOX LOCKERS

When you need an economical multi-purpose, practical and space-saving locker solution.





FOUR-WIDE WALL MOUNT

Wall mount Lockers provide ample additional storage space for 4 persons. Wall mount lockers can be used as supplemental storage in combination with other lockers or in specific applications where floor space is limited and storage requirements must be met. 48" wide under-mount coat rod is optional.





16 gauge continuous piano hinge

STANDARD



BOX FINGER PULL Box door single-point thru-the-door finger pull padlock hasp (shown with optional Padlock Strike Plate)

SIXTEEN-PERSON

An economical solution for personal security along and hanging space for full length garments. Ideal for student and teacher lounges, offices, commercial and retail establishments. Sixteen-Person lockers come with standard 6" high legs; 48" coat rod included



STRIKE PLATE
Padlock Strike Plates
for box doors protect
finish from being
marred by padlock

STANDARD KD	STANDARD KD SPECIALTY LOCKER SIZES				
MODEL	WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT	
Two-Person Duplex Sixteen-Person 4-Wide Wall Mount	15", 18" 15" 72" 48"	12", 15", 18", 21" 12", 15", 18", 21" 18" 18"	N/A 60", 72" 12" 12"	60", 72" 60", 72" 78" (with 6" legs) 14-3/4"	



SPECIALITY KD WARDROBE & BOX LOCKERS

Duplex & Two Person Lockers

DUPLEX



The most economical full length locker available, it conserves valuable floor space, yet provides ample height for hanging full length garments. Duplex lockers provide two completely private lockers in each frame. One hat shelf and two single hooks are standard in each wardrobe opening. Coat rods are optional for 18" and deeper models.



STANDARD FOR WARDROBE DOORS



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching

STANDARD



12 gauge latch hook is welded to frame

STANDARD FOR BOX DOOR



16 gauge continuous piano hinge

TWO-PERSON

Two-Person lockers provide ample storage space for two users in a 15" or 18" wide space. Upper box doors are controlled by command latches located in the corresponding lower compartment. Two single hooks per wardrobe opening are standard. Coat rods are optional for 18" and deeper.



STANDARD

Upper box door of Two-Person locker is opened from within user's wardrobe compartment



FEATURES

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components.

DOORS: 16 gauge louvered doors, 18 gauge for 9" wide are standard. Security-Plus, Safety-View and diamond perforated door styles are available.

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers.

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side.

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier 1-double
- 1-double & 1- single hook for 9" wide openings 30" and higher .

SHELVES: Hat shelf for single tier openings 60" and 72" high





QUIET & WHISPER QUIET KD WARDROBE LOCKERS

Our Silent Approach To Locker Design



STANDARD QUIET

Lockers are constructed just like our Classic K.D. lockers, except the door is furnished without louvers to limit air rush through the door, providing quiet operation. Perforations on upper and lower door flanges allow concealed ventilation.



DOOR FEATURES

Perforated top and bottom door flanges for all Standard Quiet and Whisper Quiet lockers allow for concealed ventilation



WHISPER QUIET

The die-formed sound deadening panel filled with acoustical material provide the quietest and most aesthetically appealing gravity latch locker.

STANDARD



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching

STANDARD



12 gauge latch hook is welded to frame

STANDARD



16 gauge continuous piano hinge



UPGRADES all body components to 16 gauge with18 gauge back. Recommended when placing heavy items in lockers such as backpacks.



Double Tier 1-Wide FEATURES

BODY CONSTRUCTION: Knock down (KD) 24 gauge solid body components

DOORS: 16 gauge plain doors (18 gauge for 9" wide), sound deadening panel for Whisper Quiet lockers only

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

HINGES: 16 gauge continuous piano type

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multipoint spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high
- Isolated latching mechanism for Whisper Quiet only

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier 1-double
- 1-double & 1- single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high **SIZES:** See page 34

NOTES: All production KD lockers are supplied without legs unless otherwise specified. Standard Quiet and Whisper Quiet lockers are available with plain doors only. Additional perforations/louvers in the door will increase decibel levels thus reducing the efficiency of our quiet design



HEAVY-DUTY CORRIDOR (HDC) KD WARDROBE LOCKERS



HEAVY-DUTY CORRIDOR lockers. commonly known as HDC lockers, are designed to include all the great features of our Classic KD wardrobe lockers; however, the door gauge is increased to 14 gauge which is 25% heavier than standard 16 gauge doors. To further increase door integrity, we offer our HDC Premier model which includes an 18 gauge full height door stiffener.



PREMIER HDC LOCKERS

Include a 3" wide 18 gauge full height door stiffener. A 1-1/2" wide stiffener will be furnished for 9" wide Premier doors.





Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching

STANDARD



12 gauge latch hook is welded to frame

STANDARD



16 gauge continuous piano hinge



FEATURES

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 14 gauge louvered doors are standard. Plain, Security-Plus, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

HINGES: 16 gauge continuous piano type

NOTES: All production KD lockers are supplied without legs unless otherwise specified

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double 1-single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

SIZES: See page 34







STUDENT KD LOCKERS

MARQUIS® STUDENT KD LOCKERS

Since 1983, Superior® Marguis Student KD lockers are the most specified singlepoint lockers in the marketplace. Designed with superior features usually reserved

for heavy-duty athletic lockers, our sixth generation Marquis Student locker is an engineering achievement.

STANDARD



Deep-drawn 304 stainless steel recessed handle with single-point latching



STANDARD



16 gauge continuous piano hinge

STANDARD



11 gauge single-point latch MIG welded to Hollow-T frame

STANDARD



Includes a 3" wide 18 gauge full height door stiffener, spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Marguis doors.



18 guage full width door liner covers back of recessed handle. Built-in lock attaches to both door liner and recessed handle for maximum security and rigidy.



UPGRADES all body components to 16 gauge with18 gauge back. Recommended when

FEATURES

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 14 gauge plain doors with 18 gauge full-height door stiffener are standard. Louvered, Security-Plus and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free quiet, 11 gauge latch hooks MIG welded to frame

HINGES: 16 gauge continuous piano type is standard. Heavy-duty 13 gauge 3-1/2" 7-knuckle hinges are available as an upgrade

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier 1-double
- 1-double & 1- single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified.



AFFORDABILITY AND FUNCTIONALITY IN ONE LOCKER

HEAVY-DUTY VENTILATED (HDV) KD LOCKERS

HEAVY-DUTY VENTILATED (HDV) knock-down lockers are the perfect solution when budget restrictions prevent the use of fully-framed all-welded lockers.



PREMIER SERIES HDV LOCKERS include our 3" wide 18 gauge full height door stiffener welded to the inner door face providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Premier Series Wardrobe and 12" wide Premier Series Box Locker doors.



MARQUIS SERIES HDV LOCKERS which include our deep-drawn seamless stainless steel recessed handle with single-point latching, and a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Marquis Series doors.

STANDARD FOR WARDROBE DOORS



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching

STANDARD



12 gauge latch hook is welded to frame

STANDARD



16 gauge continuous piano hinge

STANDARD FOR BOX DOORS



Single-point thru-the-door finger pull padlock hasp is standard for HDV box doors 18" high and under

GREENGUARD GOLD GERTIFIED

FEATURES

BODY CONSTRUCTION: (Wardrobe & Box lockers): Knock down (KD) with 16 gauge solid top, bottom and intermediate shelves, 16 gauge diamond perforated sides, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Security-Plus and plain door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Wardrobe Lockers (doors 20" and higher) - Deep-drawn seamless stainless steel recessed handle, Box lockers - Single-point thru-the-door finger pull padlock hasp

HINGES: 16 gauge continuous piano type

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher,
- 2 point latching for openings 20" high thru 36" high

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier 1-double
- 1-double & 1- single hook for 9" wide openings 30" and higher
- Box lockers no hooks

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high **NOTES:** All production KD lockers are supplied without legs unless otherwise specified







SAFETY-VIEW™ KD LOCKERS



STANDARD Deep-drawn 304 stainless steel recessed handle

STANDARD



12 gauge latch hook is welded to frame

with multi-point gravity lift-type latching

STANDARD



16 gauge continuous piano hinge

GREENGUARD

FEATURES

BODY CONSTRUCTION: Knock-down, 24 gauge,

SPECIAL FEATURES: Wardrobe: Two, high strength injection molded polycarbonate panels per door for content viewing Box: High strength injection molded polycarbonate doors for content viewing

DOOR: 16 gauge (For wardrobe doors only)

HINGES: Continuous piano type

HANDLE: (wardrobe): Stainless steel recessed handle with multipoint gravity lift-type latching. Recessed handle protects finish from being marred by padlock. Single-point projecting friction catch door pull prepared for both padlock or built-in lock is standard for box doors

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier.

COAT RODS: Available for single tier at a nominal cost.

SHELVES: Hat shelf is included in 60" and 72" high single tier lockers. notes: Meets UL flammability standards, Polycarbonate is approved by the Consumer Product Safety Commission (CPSC16CFR 1201). All production lockers are standard with no legs unless otherwise specified. Safety-View doors are available as a retrofit to most lockers.

NOTES: Meets UL flammability standards, Polycarbonate is approved by the Consumer Product Safety Commission (CPSC16CFR 1201). All production lockers are standard with no legs unless otherwise specified. Safety-View doors are available as a retrofit to most lockers.



Double Tier lockers

(Also available in single and triple tier)

SAFETY-VIEW™ PLUS KD LOCKERS

SAFETY VIEW PLUS

See-thru doors







Four and Six Tier Lockers (also available in five tier)

STANDARD



Box door single-point thru-the-door finger pull padlock hasp

4-wide wall mount lockers

STANDARD SAFETY-VIEW & SAFETY VIEW PLUS LOCKER SIZES						
	MODEL	OPENING WIDTH	OPENING Depth	OPENING HEIGHT	FRAME HEIGHT	
Safety-View	Single Tier	12"	12", 15", 18"	60", 72"	72"	
Lockers	Double Tier	12"	12", 15", 18"	30", 36"	72"	
	Triple Tier	12"	12", 15", 18"	20", 24"	72"	
Safety-View	Four Tier	12"	12", 15", 18"	18"	72"	
Plus Lockers	Five Tier	12"	12", 15", 18"	12"	60"	
	Six Tier	12"	12", 15", 18"	12"	72"	
	Sixteen-Person	12"	18"	12"	78" with 6" legs	
	4-Wide Wall Mount	12"	18"	12"	14-3/4"	

STANDARD



16 gauge continuous piano hinge







304 STAINLESS STEEL LOCKERS

Attractive Durable Rust Resistant

304 Stainless Steel

The rich appearance and durable surface of Superior 304 Stainless Steel Lockers make them the perfect locker solution for areas prone to rust and sanitation concerns and are ideal for food industry, pool area and outdoor.





STANDARD FOR WARDROBE DOORS



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching

STANDARD



12 gauge latch hook is welded to frame



Shown with optional 6" legs

STANDARD FOR BOX DOOR



Single-point thru-the-door finger pull padlock hasp is standard for HDV box doors 18" high and under

GENERAL SPECIFICATIONS

BODY CONSTRUCTION: Knock down (KD) with 24 gauge 304 stainless steel body components

DOORS: 16 gauge 304 stainless steel louvered doors are standard.

FRAME: 16 gauge 304 stainless steel frame with 16 gauge horizontal cross member between doors on double tier wardrobe lockers

HANDLE: Wardrobe doors have a deep-drawn seamless 304 stainless steel recessed handle. Box doors the projecting finger-pull handle is standard

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING (WARDROBE): 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

LATCHING (BOX): Single-point thru-the-door finger pull padlock hasp

HINGES: 2" long 16 gauge 5-knuckle stainless steel hinges. 3 hinges for doors 48" and higher and 2 for doors under 48" high.

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher. No hooks in openings less than 20" high.


SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified





Superior® Locker Accessories

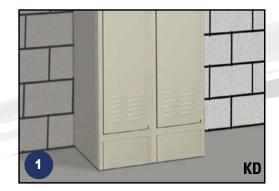










SPECIFICATIONS

- 1 6" Closed Front Base (KD lockers only): Shall be fabricated of 16 gauge cold rolled sheet steel flanged on all four sides for rigidity. Front bases include projecting tabs on side flanges designed to align with holes in front legs allowing front bases to be snapped into place requiring no additional fasteners. Side bases are to be included at all exposed ends and are bolted to front and rear legs. Finish to match lockers.
- 2 4" Continuous Z-Base (KD lockers only): Shall be fabricated from 16 gauge cold rolled sheet steel fabricated in 72" lengths, flanged at the top to form a 1-3/8" toe space and at the bottom allowing concealed fastening to the finished floor. Continuous Front Bases include holes for use with splice plates where bases are joined end-to-end. End Bases are to be included at all exposed ends. Where additional support is desired, End Bases may be substituted for splices at Continuous Front Base joints. Finish to match lockers.
- 3 20 gauge Individual Slope Top (KD lockers only): Not less than 20 gauge cold rolled sheet steel, 18 degree pitch, fabricated to be installed individually over each locker. Slope top is formed to include a full back. Individual Slope Tops are to be installed in addition to the locker flat top. End closures are to be provided at exposed ends. Finish to match lockers.
- **4 18 gauge Continuous Slope Top:** Not less than 18 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers.
- 4 16 Gauge Continuous Slope Top: Not less than 16 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers.
- 5 Recessed Trim: Fabricated of 16 gauge cold rolled sheet steel. 3" wide side trim shall be notched at the top and include a retainer to allow the 3" wide top trim to fit snugly into the side trim. Recess trim is designed to be used when the lockers are installed with the locker fronts flush with the top and side walls. The top and side trim will project 3/8" beyond the side and top walls and include return bends back to the walls. Finish to match lockers.
- **6 Minimum Punched End Panel (KD lockers only):** Shall be from 18 gauge cold rolled steel and formed to fit tightly over the universal side panel at exposed row ends. Holes are provided at perimeter for fastening to locker. Minimum Punched End Panels are designed to cover all fasteners other than those at the perimeter of the panel. Finish to match lockers. Provide at all exposed ends.
- 7 Boxed End Panel: Shall be "Boxed" type formed from 16 gauge cold rolled steel with 1" 0.D. double bends on sides and a single bend at top and bottom with no exposed holes or bolts. If lockers have slope tops, end panels must be formed with slope at top to cover the ends of the slope tops. Finish to match lockers. Provide at all exposed ends.
- 8 Fillers: Provide where indicated, of not less than 16 gauge cold rolled sheet steel, factory fabricated and finished to match lockers.









LOCKER BENCHES & PEDESTALS

Pedestals



4805 HEAVY DUTY STEEL PEDESTAL

Fabricated from 14 gauge tube steel with 11 gauge formed flanges.

Color: TAN



8032 ADJUSTABLE STEEL PEDESTAL

With cast aluminum base and concealed anchoring to floor.

Color: TAN



4810 EXTRA HEAVY-DUTY CAST IRON PEDESTAL

With 6" diameter top and bottom flanges with three anchoring holes.

Color: TAN



4820 ALUMINUM MOVEABLE PEDESTAL

Includes holes for optional permanent anchoring to floor. **Color: TAN**



4825 STAINLESS STEEL PEDESTAL

Fabricated from 16 gauge stainless steel. Designed for movable and fixed use.

Color: Unpainted

Benches

WHITE NORTHERN HARD WOOD

Locker Benches are 9-1/2" wide x 1-1/4" thick, made from laminated white northern hard wood, and finished with one coat, deeppenetrating hot sealer, and two coats of heavy body, high-impact, hot, hydraulically applied lacquer. Bench tops are standard in one foot increments from 3' thru 12'. Non-standard lengths are available on special order (pedestal requirement will be for next standard size up).

BENCH TOP LENGTH	3' - 8'	9' - 12'
PEDESTALS REQUIRED	2	3

Note: Bench top lengths over 12' will be supplied in sections

PHENOLIC

9 1/5" x 3/4" Thick, made from Wilsonart® phenolic in choice of 18 standard colors. See page 89 for color choices. Available in 1 foot incriments from 3' to 12'.

BENCH TOP LENGTH	3' - 5'	6' - 8'	9' - 12'
PEDESTALS REQUIRED	2	3	4

Pedestal space not to exceed 40" O.C.





LOCKS

Padlocks, Built-in Locks & Specialty Locks

List Industries recommends MASTER® locks for use on all Superior Lockers.



Master Lock Co. Built-In Combination Locks

Available in spring-bolt and dead-bolt styles, are key controlled and include multiple combination settings.



ADA Compliant Version Available



Master Lock Co. Combination Padlocks

Available standard and master-keyed, Master Lock padlocks can be used on all locker types.





Master Lock Co. Built-In Key Locks

Available in spring-bolt and dead-bolt styles - Available in standard or master-keyed.



ADA Compliant Version Available



Hallowell DIGITECH™ Locks

Digitech™ electronic access locks can be programmed for shared or permanent use



ADA Compliant



SAFE-O-MAT® Built-In Coin, Token & Card Locks

Available in coin return and coin collect as well as token collect and card access styles.



Hallowell DIGITECH™ II RFID Locks

Digitech RFID electronic acess locks can be programmed to work wiht most current RFID systems



ADA Compliant



Hallowell DIGITECH™ GL Locks

Digitech™ GL electronic locks are compatable with all Superior® gravity lift-type latching lockers. Lock fits nicely in our recessed handle



ADA Compliant

NOTE: An ADA compliant lock must be used on any locker that is required to meet ADA guidelines.



DOOR VENTILATION OPTIONS

Know your List lockers

Please refer to individual product pages for applicable options.



Plain Doors (Quiet)



Louvered Doors (Classic)



Louvered Doors (With Door Stiffener)



Diamond Perforated Doors (High Ventilation)



Diamond Perforated Doors (With Door Stiffener)



Security-Plus Doors (Security Ventilation)



Safety-View Doors (See-thru Polycarbonate Insert)



Safety-View Plus Box Doors (See-thru Polycarbonate Door) 12" wide x 12" high and 12" wide x 18" high KD box doors only




Hybrid Red Oak Plain Door



Hybrid Red Oak Panel Door

QUICKSHIP

MODULAR CUBIX LOCKERS



Stack Cubix lockers and easily attach adjacent units with prepunched holes on top, sides and bottom. Or use the keyhole punched back for wall mounting. Ships Knock-Down ready-to-assemble,

- 3 Door types to choose from
- 3 Color choices
- 2 Handle/Lock choices





Safety-View Door with Key Cam Lock



Ventilated Diamond Perferated Locker Door



Plain Locker Door with Finger Pull Prepared for Padlock

Description	Overall Width	Overall Height	Overall Depth	Catalog No.	Color Selection
PREPARED FOR PADLOCK (NOT INCLUDE	D)			
Ventilated Door	11-5/16	12-11/16	12	HC121212-1DP	MB, ME, PL
Solid Door	11-5/16	12-11/16	12	HC121212-1PL	MB, ME, PL
Safety-View Plus Door	11-5/16	12-11/16	12	HC121212-1SVP	MB, ME, PL
WITH BUILT-IN KEY LOCK (I	NCLUDED)				
Ventilated Door	11-5/16	12-11/16	12	HC121212-1DP-K	MB, ME, PL
Solid Door	11-5/16	12-11/16	12	HC121212-1PL-K	MB, ME, PL
Safety-View Plus Door	11-5/16	12-11/16	12	HC121212-1SVP-K	MB, ME, PL









GENERAL SPECIFICATIONS

BODY CONSTRUCTION: Knock-down, 16 gauge

HINGES: 16 gauge continuous piano hinge

DOORS: 18 gauge Solid (non-vented), Diamond

Perforated, or Safety-View (clear)

HANDLE/LOCKS: Finger pull latch prepared for padlock (sold separately), or Built-in key lock

HOOKS: None

COAT RODS: None

SHELVES: None

LEGS: None









BACKPACK / LAPTOP LOCKERS







SPECIAL FEATURES:

- · Each locker has built-in channel for concealed aftermarket wiring to convert lockers to charging stations.
- Channel shall include punch outs for electrical outlet in each opening. Wiring and outlets by others.

3-Tier 1-Wide 3 Openings

POWERED: Each locker has built-in channel for concealed after-market wiring to convert lockers to charging stations.

VENTILATED: Diamond perforated locker sides promote continuous air flow to cool chargers and components while keeping your items secure.

LOCK: Built-in Electronic Access Digitech lock - also acts as locker handle









BACKPACK / LAPTOP LOCKERS

	WIDTH	DEPTH	HEIGHT	GROUPING	OPENINGS	UNASSEMBLED CAT NO.	ASSEMBLED CAT NO.	COLOR SELECTION
ı	3-TIER							
1	15	18	78	1-wide	3	UELBP1588-3PL	UELBP1588-3A-PL	PL
	45	18	78	3-wide	9	UELBP3588-3PL	UELBP3588-3A-PL	PL
	15	21	78	1-wide	3	UELBP1518-3PL	UELBP1518-3A-PL	PL
	45	21	78	3-wide	9	UELBP3518-3PL	UELBP3518-3A-PL	PL
	18	18	78	1-wide	3	UELBP1888-3PL	UELBP1888-3A-PL	PL
	54	18	78	3-wide	9	UELBP3888-3PL	UELBP3888-3A-PL	PL
	18	21	78	1-wide	3	UELBP1818-3PL	UELBP1818-3A-PL	PL
	54	21	78	3-wide	9	UELBP3818-3PL	UELBP3818-3A-PL	PL
	4-TIER							
	15	18	78	1-wide	4	UELBP1588-4PL	UELBP1588-4A-PL	PL
	45	18	78	3-wide	12	UELBP3588-4PL	UELBP3588-4A-PL	PL
	15	21	78	1-wide	4	UELBP1518-4PL	UELBP1518-4A-PL	PL
	45	21	78	3-wide	12	UELBP3518-4PL	UELBP3518-4A-PL	PL
	18	18	78	1-wide	4	UELBP1888-4PL	UELBP1888-4A-PL	PL
	54	18	78	3-wide	12	UELBP3888-4PL	UELBP3888-4A-PL	PL
	18	21	78	1-wide	4	UELBP1818-4PL	UELBP1818-4A-PL	PL
	54	21	78	3-wide	12	UELBP3818-4PL	UELBP3818-4A-PL	PL



4-Tier 1-Wide 4 Openings



GENERAL SPECIFICATIONS

BODY CONSTRUCTION: Knock down (KD) with 16 gauge solid top, bottom and intermediate shelves, 16 gauge perforated sides, 18 gauge solid back

DOORS: 14 gauge solid sheet steel

FRAME: 16 gauge welded frame

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

HANDLE: DigiTech™ electronic, code access lock serves as handle

LATCHING: Single-point cam latch

HINGES: 16 gauge continuous piano hinge

SHELVES: 1 fixed hat shelf per opening

HOOKS: none





MOBILE DEVICE LOCKERS





Prepared for Padlock




Keyed Cam Lock



Digitech™ **Electronic Locks**







CLEAR	CLEAR	CLEAR
OPENING	OPENING	Opening
WIDTH	HEIGHT	Depth
7 1/2	5 1/2	11





GENERAL SPECIFICATIONS

BODY CONSTRUCTION: 20 gauge cold rolled steel

DOORS: 20 gauge solid (non-vented)

HANDLE/LOCKS Locks serve as door handle/pull

- PADLOCK Padlock hasp cam lock for padlocks by others
- KEY LOCK Cylinder cam locks
- **DIGITECH™ ELECTRONIC LOCK**: Pin code access electronic lock ships in temporary-use mode that can be programmed for permanent use

HINGES: 16 gauge continuous piano hinge

COAT RODS: None

SHELVES: None

HOOKS: None

LEGS: None










SUPERIOR® BULK STORAGE LOCKERS



Superior® Bulk Storage Lockers are the most economical way to provide safe and secure storage in virtually any facility.

Choose from in-stock or custom sizes to fit your needs.

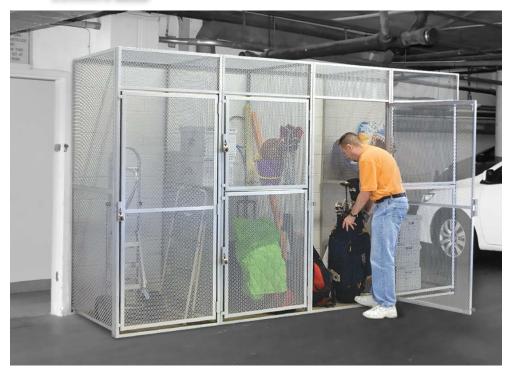

- ✓ Single & Double Tier
- ✓ Economical
- ✓ Secure
- **√** Durable
- √ Fast & Easy Installation
- ✓ Low Life-Cycle Cost
- ✓ Attractive
- ✓ User Friendly



Shown with optional expanded metal top

13" transom

Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges

Welded door brace for added rigidity

Welded padlock hasp and ergonomic welded-on door pull

1/2" 16 gauge flattened expanded metal doors and sides

Heavy-gauge vertical frame channels and

Horizontal frame angles



Optional 16 gauge 1/2" expanded metal top makes for a very secure structure adding rigidity and ensuring a higher level of protection from theft





The Heavy-Duty 7 knuckle hinges and door stops are welded to the frame for extra strength and security of contents, imparting a more finished and attractive appearance to the unit.

Door handles are formed from one solid piece of steel and are welded to the frame for extra strength



711 Light Gray (PL)

Single Tier Starter Unit


NOTE: In the interest of safety, all lockers must be securely anchored to the floor and/or wall.





SUPERIOR® BULK STORAGE LOCKERS

Custom Installations

Superior® Bulk Storage Lockers' unique construction provides for a simple, easy way of handling interference from overhead pipes and/or ducts.







Showing cut out (with repair angles) to allow for interfering duct.

Repair Angles

REPAIR ANGLE 16 gauge 36" long repair angle is prepunched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle.

Blue part number denotes in stock sizes. Custom sizes are also available.

BULK STORAGE LOCKER STOCK SIZES

Width 36" 48" Depths 36" 48" 60" Height 90"

Standard Sizes available in single and double tier configurations.

*Custom sizes are also available.

OPTIONS

TOPS are recommended for situations where the ceiling height is 8'-6" or more when using standard 7'-6" high component modules.

SHELVES are used as dividers between top and bottom openings of double tier lockers. May also be used in single tier lockers for additional floor space and may be shorter than depth of locker to provide space for long items.

BACKS are required for back-to-back installations or where a single row is set away from a wall.

BOTTOMS are recommended for use on all single or double tier lockers if dampness prevails.



			STARTER UNITS		ADDER	UNITS
w	D	Н	Part No. (Right Hinged)	Part No. (Left Hinged)	Part No. (Right Hinged)	Part No. (Left Hinged)
SINGLE	TIER			-		-
36	36	90	BSL363690-R-1S-PL	BSL363690-L-1S-PL	BSL363690-R-1A-PL	BSL363690-L-1A-PL
36	48	90	BSL364890-R-1S-PL	BSL364890-L-1S-PL	BSL364890-R-1A-PL	BSL364890-L-1A-PL
36	60	90	BSL366090-R-1S-PL	BSL366090-L-1S-PL	BSL366090-R-1A-PL	BSL366090-L-1A-PL
48	36	90	BSL483690-R-1S-PL	BSL483690-L-1S-PL	BSL483690-R-1A-PL	BSL483690-L-1A-PL
48	48	90	BSL484890-R-1S-PL	BSL484890-L-1S-PL	BSL484890-R-1A-PL	BSL484890-L-1A-PL
48	60	90	BSL486090-R-1S-PL	BSL486090-L-1S-PL	BSL486090-R-1A-PL	BSL486090-L-1A-PL
DOUBLE	TIER					
36	36	45	BSL363690-R-2S-PL	BSL363690-L-2S-PL	BSL363690-R-2A-PL	BSL363690-L-2A-PL
36	48	45	BSL364890-R-2S-PL	BSL364890-L-2S-PL	BSL364890-R-2A-PL	BSL364890-L-2A-PL
36	60	45	BSL366090-R-2S-PL	BSL366090-L-2S-PL	BSL366090-R-2A-PL	BSL366090-L-2A-PL
48	36	45	BSL483690-R-2S-PL	BSL483690-L-2S-PL	BSL483690-R-2A-PL	BSL483690-L-2A-PL
48	48	45	BSL484890-R-2S-PL	BSL484890-L-2S-PL	BSL484890-R-2A-PL	BSL484890-L-2A-PL
48	60	45	BSL486090-R-2S-PL	BSL486090-L-2S-PL	BSL486090-R-2A-PL	BSL486090-L-2A-PL
TOP PA 36 36	36 48		4803636PL 4803648PL		• Single Tier: Overall Height 90"	
36	60		4803660PL		Opening Height: 75-1/2"	
48	36		4804836PL		opening neight. 75-1/2	
48	48		4804848PL		• Double Tier:	
48	60		4804860PL		2000.0	
FRONT	EXTENSIO	N PANEL	S		Overall Height 90"	
6		90	4600690PL		Upper Opening Height: 31-	
12		90	4601290PL		Lower Opening Height: 42'	1
18		90	4601890PL			
24		90	4602490PL		• Doors: available right-han	d or loft hand
BACK P	ANELS				· ·	iu ui ieit-iiallu
36		90	4703690PL		hinged	
48		90	4704890PL			
	ANGLES					
	CHULLS					
36			20100			



24/7 PARCEL LOCKER LETS YOU RECEIVE AND PICK UP ANYTIME.

24/7 PARCEL LOCKER

- MULTIPLE TIER MODELS
- ECONOMICAL
- SECURE
- DURABLE
- FAST & EASY INSTALLATION
- LOW LIFE-CYCLE COST
- ATTRACTIVE
- USER FRIENDLY

Easily Manage Tenant Package Delivery CONCIERGE...

- 1. Receives package for tenant
- 2. Places package in locker
- 3. Locks door using 4-digit PIN
- 4. Texts or emails Locker Number and PIN to Tenant

TENANT, AT HIS/HER CONVENIENCE...

- 1. Enters PIN into lock of appropriate locker
- 2. Removes package
- 3. Closes door of now empty locker, PIN is erased



DIGITECH ELECTRONIC LOCKS

SECURITY CODE LOCK FEATURES

 8-digit master and sub-master codes for two levels of management security.



2 AA BATTERIES (INCLUDED)

- Provides over 10,000 normal uses.
- · LED's Flash to indicate low battery level

MASTER KEY

 Locker can be opened with master key if batteries are exhausted.



6-DOOR PARCEL LOCKER 36" x 24" x 72" Locker (6) 24" x 24" doors



10-DOOR PARCEL LOCKER 36" x 24" x 72" Locker (6) 18" x 8" doors above (4) 18" x 24" doors at bottom



14-DOOR PARCEL LOCKER 36" x 24" x 72" Locker (12) 18" x 8" doors above (2) 18" x 18" doors at bottom



18-DOOR PARCEL LOCKER 36" x 24" x 72" Locker (18) 18" x 8" doors

GENERAL SPECIFICATIONS

BODY: All-Welded Unibody Construction 16 gauge solid body with 18 ga backs

DOORS: 14 ga solid doors with 16 ga piano hinge

LOCKS: DigiTech horizontal electronic locks Ships fully-assembled, locks installed in field

COLOR: Dark Gray (Charcoal) Body with Light Gray (LIGHT GRAY) Doors





SUPERIOR® PORTABLE GATES



SUPERIOR® PORTABLE GATES
ARE IDEAL FOR:

- SCHOOLS
- SHOPPING MALLS
- RECREATION CENTERS
- FACTORIES
- LIBRARIES
- HOSPITALS
- OFFICE BUILDINGS
- FINANCIAL INSTITUTIONS
- THEATERS
- MUSEUMS



SECURITY • TRAFFIC CONTROL • PORTABILITY

- In Stock for shipment within 5 days of receipt of order
- Quick and easy installation. Install between two walls instantly without anchors to walls or floor
- Simplified, patented pressure lock system
- Floor anchors are not required but are vailable for special installations
- Compact, fold-up size and heavy duty swivel casters make moving and storage easy
- Plated finish
- Padlock hasp is standard
- Cylinder locks are available for additional security
- Two or more gates can be joined together for large expanse

Five sizes to accommodate 3'-6" wide to 18'-0" wide conditions. Connect multiple gates together for wider applications.

SUPERIOR® PORTABLE GATES							
Model	For Openings	Collapsed Size	Height	Weight (lbs)			
P601-06 P601-09 P601-12 P601-15 P601-18 PG-CL PG-FAA	3'-6" to 6'-0" 6'-0" to 9'-0" 7'-0" to 12'-0" 11'-0" to 15'-0" 13'-0" to 18'-0" Cylindor Locks Floor Anchors	19" x 30" 19" x 30" 24" x 30" 30" x 30" 30" x 30"	6'-6-1/2'' 6'-6-1/2'' 6'-6-1/2'' 6'-6-1/2'' 6'-6-1/2''	193 197 254 311 374			
PG-A	Additional Anchors						

EXCLUSIVE SUPERIOR® PRESSURE LOCK SYSTEM WORKS LIKE THIS:

- 1. Raise unit retainer channel to vertical position and secure
- 2. Extend gate until rubber bumpers touch both walls
- 3. Lower the male lock channel (with pin) until it rests on carriage channels within guides and locking bracket
- 4. Lower female lock channel (with adjustment holes) until it rests within the male lock channel with pin. Pin need not engage a hole in female lock channel
- 5. Raise both channels until pin engages the hole immediately to the right. Applying moderate pressure, push both channels down until they rest within guides and locking bracket. Lock in position













- Custom Wood Lockers
- Sport Lockers
- Country Club Lockers
- Fitness Center Lockers
- Health Spa Lockers















Ideal Choice for Your Next Wood Locker Project

Bring Prestige to your Organization with Custom Wood Lockers

Create a memorable environment for your current members, impress your potential members or dazzle day-use customers with Superior® Custom Recruiter Wood Lockers. Our lockers bring an upscale and luxurious design to your locker room with a very reasonable lifecycle cost.

We use the finest materials, and finish our lockers with a two coat, catalyzed, clear cabinet lacquer to keep the finish looking like new year-in and year-out. Each locker is hand crafted by expert craftsmen using state-of-the-art equipment to create an heirloom quality masterpiece.











Reinforce your commitment to your players!



Equip them with the industry's finest all-wood sport lockers. Superior® Recruiter™ custom wood sport lockers are made to order, and offer a

variety of different options allowing you to tailor your locker room to your team's specific requirements.





Optional LED Lighting under locker top and/or under shelf



Optional USB & 110 power outlet inside upper security box





Optional duel fan ventilation system for forced air ventilation of foot locker

Custom Wood Sport Lockers

In addition to our standard stock designs and sizes, our engineers are readily available to assist you in custom designing a locker to meet your specific needs. Be it a fitness center, team locker room,

country club or resort health spa, we stand behind our product with a full one year warranty that covers defects in materials and workmanship.

Five Side Options











Set Back Sides

Full Curve Sides

Standard Sides

Half Curve Sides

Optional Features



Name plate holders



Sholder pad rack



Sholder pad & Helmet rack



Foot locker front panel mesh insert



Engraved team logo on security box door.



LED lighting kit



Optional mesh expanded metal side inserts for additional ventilation



Optional Bat / Lacross Stick Caddy

LOCK OPTIONS: • Padlock

• Built in combination lock

Mechanical lock

• Electronic locks



The Beauty Is In The Details... These lockers are high quality furniture, each locker is a true work of art, made in our manufacturing plant and shipped directly to you. BROWN JOHNSON ... IN-STOCK Note: End Panels are required

- In-stock & ready to ship
- Stock sizes: 24" & 30" w x 24" d x 84" h
- Fabricated from furniture grade red oak
- Excellent moisture resistance

- Upper security box w/ built-in combination lock or DigiTech™ electronic lock
- Optional engraved logo on security box door
- Lower foot locker/seat for storage of bulk items
- Ships fully-assembled





A Powerful Recruiting Tool



Lock Options for All Lockers



Built in Combination Lock



Digitech **Electronic Lock**



Key Cam Lock





In addition to lockers, we also design and produce related items such as:

- Trophy cases
- Benches
- · Audio/video rooms
- Corian® tops fabricated by factory-certified technicians.

Our staff includes consultants to guide you through the design and budget process. We cover production scheduling, deadlines and other critical factors during this important phase.

FEATURES

FINISH: All locker parts to be finished with a three coat catalyzed clear cabinet lacquer or equivalent.

LOCKER BODY: Wood lockers shall be fabricated from 34" plain sliced red oak plywood throughout including sides, backs, grates, seats and upper and lower shelves.

LOCKER TRIM: Face trim, shelf valances, seat front nosing, seat hinge support blocking and seat side support cleats are to be fabricated from red oak lumber.

HINGES: Hinges shall for personal effects locker and seat shall be continuous hinges in bright brass plating.

HOOKS: Two hanging hooks double prong Hewi hooks.

HANG BAR: Chrome plated steel.







SOLID PLASTIC LOCKERS

Aquamax Solid Plastic Lockers are Ideal for applications where high humidity, moisture and water are present. Plastic lockers are fabricated from solid high density polyethylene panels (HDPE) for maximum strength and durability while providing corrosion resistance to most common chemicals.




Mildew and Odor Resistant Graffiti Resistant Chemical Resistant





WARDROBE DOORS: Projecting solid plastic handle with lift-type latching

Z-Tier: Multi-height storage with extended hanging space



BOX LOCKER DOORS: Single-point thru-the-door projecting friction catch door pull with padlock hasp

AQUAMAX SIZES							
MODEL	WIDTH	DEPTH	HEIGHT				
1-Tier	12"	18"	72″				
2-Tier	12"	18"	36"/ 72"				
3-Tier	12"	18"	24"/ 72"				
6-Tier	12"	18"	12"/ 72"				
Z-Tier	12"	18"	42"/ 72"				

Available in single, double, triple, four, five, six and "Z" tier configurations



FEATURES

BODY CONSTRUCTION: Knock-down, 24 gauge, High density (HDPE) Polyethylene plastic, 3/8" thick body panels

DOORS: 1/2" thick solid HDPE plain doors with perimeter ventilation

HANDLE: Wardrobe doors have a projecting solid plastic lift handle. Box doors 18" and under include a single-point projecting padlock hasp with door pull

LATCHING: Full-height lift-type latching for single, double and triple tier wardrobe lockers

HINGES: Continuous aluminum hinge is powder coated

HOOKS: Two stainless steel single prong hooks in single and double tier

SHELVES: Upper hat shelf and lower shelf included in single tier lockers 60" and 72" high

NOTES: All doors prepared for use with padlock locks not included). Production locker body components are available in white only.





ANTIMICROBIAL HDPE PLASTIC LOCKERS

MedSafe AquaMax lockers are manufactured with high density polyethylene (HDPE), containing a specially formulated ANTIMICROBIAL agent that permanently resists the growth of bacteria, mold, yeast and mildew. This special feature,

combined with all the great features of our AquaMax lockers, make these lockers ideal for use in medical, educational, retail and manufacturing environments.

HDPE contains a specially formulated antimicrobial agent that permanently resists the growth of bacteria, yeast and mildew.









+MEDSAFE	+MEDSAFE AQUAMAX SIZES MODEL WIDTH DEPTH HEIGHT							
MODEL	WIDTH	DEPTH	HEIGHT					
1-Tier	12"	18"	72"					
2-Tier	12"	18"	36"/72"					
Z-Tier	12"	18"	42"/ 72"					



Available in single, double, and "Z" tier configurations

FEATURES

BODY CONSTRUCTION: Knock-down, 24 gauge, High density (HDPE) Polyethylene plastic, 3/8" thick body panels

DOORS: 1/2" thick solid HDPE plain doors with perimeter ventilation

HANDLE: Wardrobe doors have a projecting solid plastic lift handle. Box doors 18" and under include a single-point projecting padlock hasp with door pull

LATCHING: Full-height lift-type latching for single, double and triple tier wardrobe lockers

HINGES: Continuous aluminum hinge is powder coated

HOOKS: Two stainless steel single prong hooks in single and double tier

SHELVES: Upper hat shelf and lower shelf included in single tier lockers 60" and 72" high

NOTES: All doors prepared for use with padlock (locks not included). Production locker body components are available in white only.







SOLID PHENOLIC LOCKERS



VersaMax[™] Solid Phenolic lockers are engineered to the same high level of integrety found throughout our Superior[®] locker line.

The unique qualities of phenolic resin offer many value added benefits:

- ✓ Environmentally Smart
- **✓** Moisture Resistant, perfect for wet or damp areas
- **✓ Mold and mildew resistant**
- **✓** Many colors and finish options
- ✓ Laminate surface is graffiti and scratch resistant









Phenolic Sport lockers are available in various standard styles designed to meet the needs of today's versatile athletes. Sport lockers can also be customized to meet your team's specific needs.





SOLID PHENOLIC LOCKERS

Fully assembled single unit construction. End panels and filler panels are recommended for a finished installation. Designed with mortise & tenon joints, stainless steel fasteners and frame-less doors



- . Single Tier lockers are perfect for hanging of longer garments
- Double Tier lockers offer plenty of height for hanging coats and garments while using half the floor space of a single tier locker
- Triple Tier lockers are our most economical wardrobe locker allowing hanging garments to be draped from the coat hook
- Four Tier lockers provide ample storage for larger personal items like backpacks, totes, etc.



See page 89 for color choices

Various locking options:





Padlock Hasp

Electonic Locks





Built-In Key Locks

RFID Locks





Built-In Combination Locks

Mechanical Shared Use Locks



Coin or Token Locks

4		
	E.	
i i	J	

STOCK P	HENOL	IC LOC	KER SIZES	
Tier	Width	Depth	Opening Height	Overall Height
Single Tier	12	18	72	72
Double Tier	12	18	36	72
Six Tier	12	18	12	72
Z-Tier	12	18	42	72



- Five Tier lockers are available in 12" and 14.4" high openings allowing for storage of personal belongings
- . Six Tier lockers are our most economical storage solution offers storage of purses, bags, phones and other smaller personal items

• Z-Style Lockers are the perfect compromise between single and double tier lockers offering the perfect solution when space is at a premium, but hangling of longer garments is needed.

Z-Style

GENERAL SPECIFICATIONS

BODY CONSTRUCTION: Phenolic construction, Sides and backs are 5/16" thick. Tops, bottoms and shelves are 3/8" thick.

DOORS: 1/2" thick solid phenolic with perimeter ventilation.

SHELVES: Hat shelf for single tier 60" & 72" lockers

PRODUCTION PHENOLIC LOCKER SIZES							
Tier	Width	Depth	Opening Height	Overall Height			
Single Tier	9", 12", 15", 18", 24"	12", 15", 18", 20", 24"	36", 48", 60", 72"	36", 48", 60", 72"			
Double Tier	9", 12", 15", 18", 24"	12", 15", 18", 20"	18", 24", 30", 36"	36", 48", 60", 72"			
Triple Tier	9", 12", 15", 18"	12", 15", 18", 20"	12", 20", 24"	36", 60", 72"			
Four Tier	9", 12", 15", 18"	12", 15", 18", 20"	12", 15", 18"	48", 60", 72"			
Five Tier	9", 12", 15", 18"	12", 15", 18", 20"	12", 14.4"	60", 72"			
Six Tier	9", 12", 15", 18"	12", 15", 18", 20"	12"	72"			
Z-Style	12", 15", 18"	12", 15", 18", 20"	36/24", 42", /30"	60", 72"			
Sport	18", 24"	18", 20", 24"	N/A	72", 84"			



QUICKSHIP

INDUSTRIAL SHELVING



Hallowell Industrial Grade Steel Shelving

Hi-Tech shelving is a complete shelving line with the strength needed to handle most industrial applications and versatility for today's modern facilities. Every shelving unit is designed and engineered to meet the highest standards.

A full complement of accessories including full dividers, partial dividers, label holders, swinging doors, post splices for multilevel systems and foot plates are available to complete your system.



5 DAY SHIPPING ON ALL IN-STOCK SHELVING














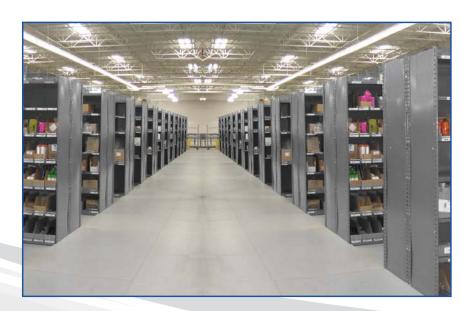



INDUSTRIAL SHELVING



BOX FORMED SHELVES

- Tubular welded box beam front and rear for maximum strength
- Exclusive triple bend side flanges for added strength
- Lapped and welded corners
- Top of shelf is punched to accept shelf dividers



ANGLE BACK POSTS & T-POSTS

- Roll formed into a unique angle shape for maximum strength
- The long leg is punched on 1-1/2" centers to allow independent shelf adjustment
- Angle Posts can be used in place of Beaded Front Posts if desired



BEADED FRONT POSTS

- · Beaded for strength
- Flush to permit straight-in/straightout shelf installation, shelf changing and full use of shelf width
- Punched on 1-1/2" centers to allow independent shelf adjustment



H-POSTS


- Designed for highdensity applications
- More than twice the capacity of standard posts
- Used at front and back
- Used with standard Hi-Tech components



ONE PIECE SHELF CLIP

- · Four sturdy and compact clips per shelf
- Keys firmly into post slots to hold shelves securely in place
- Fits Beaded Front, Angle Back Posts and T-Posts
- Non-Intrusive clip sits flush with inside edge of front posts

Standard Shelving with Hi-Tech Shelves

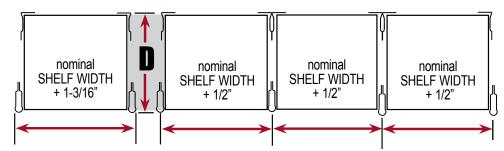

725 Dark Gray (HG)

PLUS ADD 3/4" PER ROW

FOR "D" - SINGLE FACE ADD 3/16" TO NOMINAL SHELF DEPTH

FOR "D" - DOUBLE FACE ADD 3/8" TO NOMINAL SHELF DEPTH



ACCESSORIES



Base Strips
Close bottom to prevent debris accumulation



Swinging Doors
Allow cabinet-style storage



Shelf Dividers
For organized storage







Hallowell Industrial Grade Steel Shelving

OPEN



STARTER UNIT



UNIT



5 SHELF UNIT



6 SHELF UNIT



8 SHELF UNIT

w	D	Н		5-Shelf Unit Cat No.	6-Shelf Unit Cat No.	8-Shelf Unit Cat No.	Shelf Capacity*
MEDI	UM-DU	TY					
36	12	87	Starter	4510-12	4511-12	4513-12	500*
36	12	87	Adder	A4510-12	A4511-12	A4513-12	500*
36	18	87	Starter	4510-18	4511-18	4513-18	500*
36 36	18 24	87	Adder	A4510-18	A4511-18	A4513-18	500* 500*
36	24 24	87 87	Starter Adder	4510-24 A4510-24	4511-24 A4511-24	4513-24 A4513-24	500*
48	12	87	Starter	4710-12	4711-12	4713-12	375*
48	12	87	Adder	A4710-12	A4711-12	A4713-12	375*
48	18	87	Starter	4710-18	4711-18	4713-18	375*
48	18	87	Adder	A4710-18	A4711-18	A4713-18	375*
48	24	87	Starter	4710-24	4711-24	4713-24	350*
48 HEAV	24 Y-DUTY	87	Adder	A4710-24	A4711-24	A4713-24	350*
36	12	87	Starter	5510-12	5511-12	5513-12	800*
36	12	87 87	Adder	A5510-12	A5511-12	A5513-12	800*
36	18	87	Starter	5510-18	5511-18	5513-18	800*
36	18	87	Adder	A5510-18	A5511-18	A5513-18	800*
36	24	87	Starter	5510-24	5511-24	5513-24	800*
36	24	87	Adder	A5510-24	A5511-24	A5513-24	800*
48	12	87	Starter	5710-12	5711-12	5713-12	400*
48	12	87	Adder	A5710-12	A5711-12	A5713-12	400*
48	18	87	Starter	5710-18	5711-18	5713-18	450*
48 48	18 24	87 87	Adder Starter	A5710-18 5710-24	A5711-18 5711-24	A5713-18 5713-24	450* 500*
40 48	24 24	87 87	Adder	A5710-24	A5711-24	A5713-24	500*
		Y-DUTY		A3710 24	A3711 24	A3710 24	300
	36	12	87	Starter	7510-12	7511-12	7513-12 11
36	12	87	Adder	A7510-12	A7511-12	A7513-12	1100*
36	18	87	Starter	7510-18	7511-18	7513-18	1200*
36	18	87	Adder	A7510-18	A7511-18	A7513-18	1200*
36 36	24 24	87 87	Starter Adder	7510-24 A7510-24	7511-24 A7511-24	7513-24 A7513-24	1250* 1250*
48	12	87 87	Starter	7710-12	7711-12	7713-12	750* 750*
48 48	12 18	87 87	Adder Starter	A7710-12 7710-18	A7711-12 7711-18	A7713-12 7713-18	750* 900*
46 48	18	87 87	Adder	A7710-18	A7711-18	A7713-18	900*
48	24	87	Starter	7710-10	7711-16	7713-16	900*
48	24	87	Adder	A7710-24	A7711-24		

Additional Shelves		Medium-Duty Cat No	Heavy-Duty Cat No.	Extra Heavy-Duty Cat No.	
36	12	5135-3612	5138-3612	5139-3612	See Above
36	18	5135-3618	5138-3618	5139-3618	See Above
36	24	5135-3624	5138-3624	5139-3624	See Above
48	12	5135-4812	5138-4812	5139-4812	See Above
48	18	5135-4818	5138-4818	5139-4818	See Above
48	24	5135-4824	5138-4824	5139-4824	See Above

Blue part number denotes in stock sizes.



^{*} Shelf capacities include 1.65 safety factor Color for all components 725 DARK GRAY. Optional colors are available at a nominal charge, additional lead times apply.



Starter units include two beaded front posts, two angle back posts, one pair back sway braces, two pair side sway braces and 5-8 shelves. Adder units include one beaded front post, two angle back posts, one pair back sway braces, one pair side sway braces and 5-8 shelves.




CLOSED

CLOSED SHELVING MEDIUM, HEAVY AND EXTRA HEAVY-DUTY							
w	D	Н		5-Shelf Unit Cat No.	6-Shelf Unit Cat No.	8-Shelf Unit Cat No.	Shelf Capacity*
MED	IUM-I	DUTY					
36	12	87	Starter	4520-12	4521-12	4523-12	500*
36	12	87	Adder	A4520-12	A4521-12	A4523-12	500*
36	18	87	Starter	4520-18	4521-18	4523-18	500*
36	18	87	Adder	A4520-18	A4521-18	A4523-18	500*
36 36	24 24	87 87	Starter Adder	4520-24 A4520-24	4521-24 A4521-24	4523-24 A4523-24	500* 500*
30	24	0/	Auder	A4320-24	A43Z1-Z4	A43Z3-Z4	500"
48	12	87	Starter	4720-12	4721-12	4723-12	375*
48	12	87	Adder	A4720-12	A4721-12	A4723-12	375*
48	18	87 87	Starter	4720-18	4721-18	4723-18	375*
48 48	18 24	87 87	Adder Starter	A4720-18 4720-24	A4721-18 4721-24	A4723-18 4723-24	375* 350*
48	24	87	Adder	A4720-24	A4721-24	A4723-24	350*
HEAV			Huuoi	74720 24	ATTEL ET	74720 24	000
			Charten	FF00.40	FF04 40	FF00 40	000*
36 36	12 12	87 87	Starter Adder	5520-12 A5520-12	5521-12 A5521-12	5523-12 A5523-12	800* 800*
36	18	87 87	Starter	5520-12 5520-18	5521-12 5521-18	5523-18	800*
36	18	87	Adder	A5520-18	A5521-18	A5523-18	800*
36	24	87	Starter	5520-24	5521-24	5523-24	800*
36	24	87	Adder	A5520-24	A5521-24	A5523-24	800*
48	12	87	Starter	5720-12	5721-12	5723-12	400*
48	12	87	Adder	A5720-12	A5721-12	A5723-12	400*
48	18	87	Starter	5720-18	5721-18	5723-18	450*
48	18	87	Adder	A5720-18	A5721-18	A5723-18	450*
48	24	87	Starter	5720-24	5721-24	5723-24	500*
48	24	87	Adder	A5720-24	A5721-24	A5723-24	500*
EXIK	A HE	AVY-DUT	Y				
36	12	87	Starter	7520-12	7521-12	7523-12	1100*
36	12	87	Adder	A7520-12	A7521-12	A7523-12	1100*
36	18	87	Starter	7520-18	7521-18	7523-18	1200* 1200*
36 36	18 24	87 87	Adder Starter	A7520-18 7520-24	A7521-18 7521-24	A7523-18 7523-24	1200* 1250*
36	24 24	87	Adder	A7520-24	A7521-24	A7523-24	1250*
40	40	07	04	7700 40	7794 40	7700 40	750*
48 48	12 12	87 87	Starter Adder	7720-12 A7720-12	7721-12 A7721-12	7723-12 A7723-12	750* 750*
46 48	18	87	Starter	7720-12 7720-18	7721-12 7721-18	7723-18	900*
48	18	87	Adder	A7720-18	A7721-18	A7723-18	900*
48	24	87	Starter	7720-24	7721-24	7723-24	900*
48	24	87	Adder	A7720-24	A7721-24	A7723-24	900*

Additional Shelves		Medium-Duty	Heavy-Duty	Extra Heavy-Du	ity Cat No. Cat No
36	12	5135-3612	5138-3612	5139-3612	See Above
36	18	5135-3618	5138-3618	5139-3618	See Above
36	24	5135-3624	5138-3624	5139-3624	See Above
48	12	5135-4812	5138-4812	5139-4812	See Above
48	18	5135-4818	5138-4818	5139-4818	See Above
48	24	5135-4824	5138-4824	5139-4824	See Above



* Shelf capacities include 1.65 safety factor Color for all components 725 DARK GRAY. Optional colors are available at a nominal charge, additional lead times apply.





STARTER UNIT



UNIT



5 SHELF UNIT















Heavy-Duty Industrial Grade Steel Shelving

DuraTech, Hallowell's newest line of pass-thru steel shelving, does not require cross braces, allowing access from all sides while providing the maximum strength, durability and stability needed to handle most industrial applications. DuraTech offers versatility and durability for today's modern facilities.

Our complete line of shelving is designed and engineered to the highest standards.

FEATURES

- · Access from all 4 sides.
- Top and bottom firmly attached with steel-grip nuts for superior strength
- Available in 5, 7 and 8 shelf models.
- Four angle posts are used per section allowing units to be individually located, bolted side-by-side or bolted back-to-back.
- Each intermediate shelf uses four sturdy and compact clips.
- Clips key firmly into post slots to hold shelves securely in place.
- Provides independent positioning of intermediate shelves on 1-1/2" centers.
- Bottom shelf is positioned to prevent debris from collecting beneath unit.









360° Access - No Cross Braces Creates a more efficient storage system! Our Unique Grip Nut Design Creates A Very Strong And Rigid Structure







QUICKSHIP



Top and bottom shelves attach with bolts at each corner providing a strong and rigid structure



Bottom shelf is positioned to prevent debris from collecting beneath unit



Top and bottom shelves are triple flanged at all four sides and bolted to angle posts at all four corners for maximum rigidity, durability and stability.



Angle posts are roll formed into a unique angle shape for maximum strength. Leg is punched on 1-1/2" centers to allow independent intermediate shelf adjustment



Intermediate shelves have a tubular flange at the front and rear, and exclusive triple bend sides for added strength.



Compression Shelf Clip for intermediate shelves

Fully Adjustable Intermediate
Shelves with fixed top and
bottom for a strong unit That
DOES NOT require CROSS Braces



5-SHELF UNIT 3-adjustable shelves



7-SHELF UNIT 5-adjustable shelves



8-SHELF UNIT 6-adjustable shelves

w	D	Н	* Capacity Per Shelf	5-Shelf Catalog No.	7-Shelf Catalog No.	8-Shelf Catalog No.			
36" V	36" WIDE UNITS								
36	12	87	800	DT5510-12	DT5512-12	DT5513-12			
36	18	87	800	DT5510-18	DT5512-18	DT5513-18			
36	24	87	800	DT5510-24	DT5512-24	DT5513-24			
48" V	48" WIDE UNITS								
48	12	87	400	DT5710-12	DT5712-12	DT5713-12			
48	18	87	450	DT5710-18	DT5712-18	DT5713-18			
48	24	87	500	DT5710-24	DT5712-24	DT5713-24			

All Units Include: Four angle posts, two DuraTech bolt-in shelves to be used at unit top and bottom and intermediate adjustable shelves with shelf clips applicable to unit ordered. All DuraTech shelving units are free standing and can be joined end-to-end or back-to-back.





QUICKSHIP

BOLTLESS STEEL SHELVING

Boltless shelving is designed to maximize storage space and minimize installation set-up time.

All components are engineered to attach snugly to one another without the use of loose fasteners. Pre-attached rivets to all left-to-right and front-to-back beams align with keyhole slots in the vertical posts. Once tapped into place the units are tightly assembled providing maximum strength.

Standard units consist of vertical angle posts, double rivet angle beams at the top and bottom perimeter, and single rivet angle beams running left-to-right only at the intermediate levels. Shelves are of standard 5/8" particle board, EZ-Deck steel or wire decking and simply drop into place. Shelving strength can be increased by upgrading to heavy duty beams and posts, see page 67





The versatility of our Rivetwell boltless shelving system allows you to mix and match components to meet your unique application. From standard storage applications, record storage to automotive tire racks, Rivetwell boltless shelving is your storage solution.







729 TAN (PT)

Single Rivet unit with 5 levels

Double Rivet unit with 4 levels





BOLTLESS STEEL SHELVING

ANGLE POST (STANDARD DUTY): 1-1/2" x 1-1/2" x 14 gauge cold rolled steel corner post uprights. Perfect for standard load situations.

ANGLE POST (HEAVY DUTY): Shall be 1-7/8" x 1-7/8" x 14 gauge cold rolled steel uprights. The choice when heavy duty shelving is required. Perfect for multilevel installations.

T-POST (STANDARD DUTY): 3" x 1-7/8" x 14 gauge cold rolled steel intermediate uprights.

T-POST (HEAVY DUTY): 3-3/4" x 1-7/8" x 14 gauge cold rolled steel intermediate uprights.

3 SINGLE RIVET SHELF BEAM (STANDARD DUTY): This 14 gauge low profile standard intermediate level shelf beam is perfect when maximum clear opening is required between shelf levels.

SINGLE RIVET SHELF BEAM (HEAVY DUTY): An 11 gauge heavy duty version of our low profile intermediate shelf beam allowing maximum clear opening between shelf levels.

DOUBLE RIVET ANGLE BEAM (STANDARD DUTY): This 16 gauge shelf beam is essential for stability of standard units; therefore, is used on all four sides at the top and bottom levels. Can also be used front and back or on all four sides of intermediate levels to increase unit stability and load capacity.

DOUBLE RIVET ANGLE BEAM (HEAVY DUTY): An upgrade to our standard duty double rivet angle beams, our heavy duty double rivet angle beams provide additional unit rigidity and even higher shelf capacity.

- **5 DOUBLE RIVET CHANNEL BEAM:** Maximized left-to-right shelf capacity is achieved using our 14 gauge double rivet channel beams in lieu of double rivet angle beams. These beams cannot be used at the bottom level.
- **CENTER SUPPORT:** Used to provide additional shelf support front-to-back by bolting between double rivet beams at prepunched locations. Ideal for wider spans.
- **DOUBLE RIVET Z-BEAM (STANDARD DUTY):** For 12" thru 60" beams. Used in place of double rivet angle beams to add 1" additional clearance between shelf levels. Allows particle board decking to sit flush with beam. Protects decking edges. When used at bottom level of single rivet units, shelf clearance is increased by 1" at lower level. Standard Z beams are 14 gauge.
- **B**DOUBLE RIVET Z-BEAM (HEAVY DUTY): For 69" and 72" beams. Used in place of double rivet angle beams to add 1" additional clearance between shelf levels. Allows particle board decking to sit flush with beam. Protects decking edges. Heavy-Duty Z beams are 14 gauge.
- **GENTER SUPPORT FOR Z-BEAM:** Used with Z-Beams for front to back decking support. Fabricated of 11 gauge cold rolled steel.









UNIT GROWTH CHART

When designing a shelving layout. Unit growth must be considered. To determine the overall dimension of a continuous row of shelving employing T-Posts or Angle Posts with tie plates, refer to the table below.

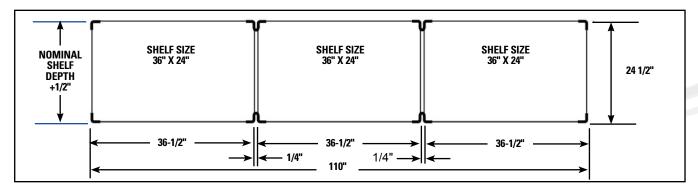


UNIT CLEAR WIDTH

Examples below are based on 36" wide shelf.

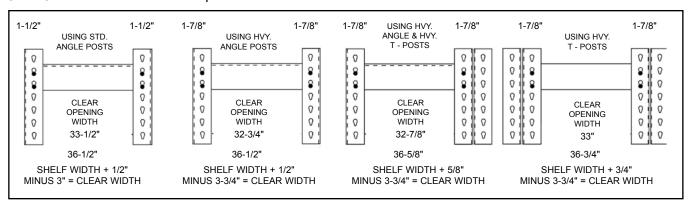


VERTICAL SHELF CLEARANCE FOR SINGLE RIVET UNITS

This chart depicts shelf clearances for typical rivetwell shelving units with 1-1/2" vertical shelf adjustment

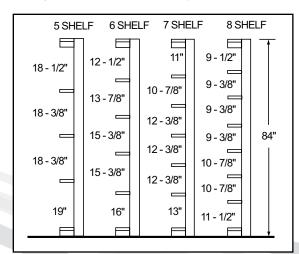

VERTICAL SHELF CLEARANCE FOR DOUBLE RIVET UNITS

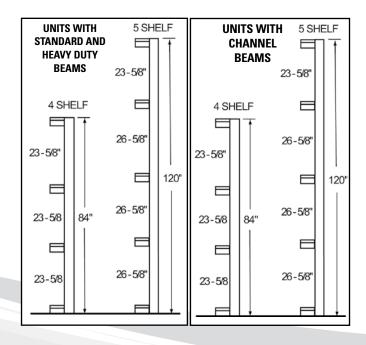



BOLTLESS STEEL SHELVING

	SINGLE RIVET UNITS - 84" HIGH											
			' Wide Units king not included)		48'' Wide Units (Decking not included)							
Levels	Depth	Shelf Capacity	Starter Model No.	Adder Model No.	Shelf Capacity	Starter Model No.	Adder Model No.					
5 Shelf	12	350	SRS361284-5S	SRS361284-5A	250	SRS481284-5S	SRS481284-5A					
Units	18	350	SRS361884-5S	SRS361884-5A	250	SRS481884-5S	SRS481884-5A					
	24	350	SRS362484-5S	SRS362484-5A	250	SRS482484-5S	SRS482484-5A					
	30	350	SRS363084-5S	SRS363084-5A	250	SRS483084-5S	SRS483084-5A					
	36	350	SRS363684-5S	SRS363684-5A	250	SRS483684-5S	SRS483684-5A					
6 Shelf	12	350	SRS361284-6S	SRS361284-6A	250	SRS481284-6S	SRS481284-6A					
Units	18	350	SRS361884-6S	SRS361884-6A	250	SRS481884-6S	SRS481884-6A					
	24	350	SRS362484-6S	SRS362484-6A	250	SRS482484-6S	SRS482484-6A					
	30	350	SRS363084-6S	SRS363084-6A	250	SRS483084-6S	SRS483084-6A					
	36	350	SRS363684-6S	SRS363684-6A	250	SRS483684-6S	SRS483684-6A					
7 Shelf	12	350	SRS361284-7S	SRS361284-7A	250	SRS481284-7S	SRS481284-7A					
Unit	18	350	SRS361884-7S	SRS361884-7A	250	SRS481884-7S	SRS481884-7A					
	24	350	SRS362484-7S	SRS362484-7A	250	SRS482484-7S	SRS482484-7A					
	30	350	SRS363084-7S	SRS363084-7A	250	SRS483084-7S	SRS483084-7A					
	36	350	SRS363684-7S	SRS363684-7A	250	SRS483684-7S	SRS483684-7A					
8 Shelf	12	350	SRS361284-8S	SRS361284-8A	250	SRS481284-8S	SRS481284-8A					
Unit	18	350	SRS361884-8S	SRS361884-8A	250	SRS481884-8S	SRS481884-8A					
	24	350	SRS362484-8S	SRS362484-8A	250	SRS482484-8S	SRS482484-8A					
	30	350	SRS363084-8S	SRS363084-8A	250	SRS483084-8S	SRS483084-8A					
	36	350	SRS363684-8S	SRS363684-8A	250	SRS483684-8S	SRS483684-8A					

STARTER UNITS consist of four standard angle posts, four left-to-right standard double rivet angle beams, four front-to-back standard double rivet angle beams, two left-to-right standard single rivet beams per intermediate level and two front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include two front-to-back single rivet beams at each intermediate level).

ADDER UNITS consist of two standard T-Posts, four left-to-right standard double rivet angle beams, two front-to-back standard double rivet angle beam, two left-to-right standard single rivet beam per intermediate level and one front-to-back standard single rivet beam at one intermediate level only (30" and 36" deep units include one front-to-back single rivet beam at each intermediate level).

PARTICLE BOARD DECKING									
SIZE	PART NO.								
36" X 12"	HPB3612								
36" X 18"	HPB3618								
36" X 24"	HPB3624								
36" X 30"	HPB3630								
36" X 36"	HPB3636								
48" X 12"	HPB4812								
48" X 18"	HPB4818								
48" X 24"	HPB4824								
48" X 30"	HPB4830								
48" X 36"	HPB4836								

Be sure to order one each of particle board decking per level. EZ-Deck steel decking can NOT be used on single rivet units.



Standard 5-shelf single rivet unit (order decking separately) Standard 4-shelf double rivet unit (order decking separately)









_										
				Without Center (Decking Not In			With Center S (Decking Not In		De	cking
Width	Beam Type	Depth	Shelf Cap	Starter Model No.	Adder Model No.	Shelf Cap	Starter Model No.	Adder Model No.	Particle Board Decking	EZ-Deck Steel Decking
48''	Standard	18	550	DRS481884-4S	DRS481884-4A	875	DRSC481884-4S	DRSC481884-4A	HPB4818	HEZD4818
	Angle Beam	24	550	DRS482484-4S	DRS482484-4A	875	DRSC482484-4S	DRSC482484-4A	HPB4824	HEZD4824
		30	550	DRS483084-4S	DRS483084-4A	825	DRSC483084-4S	DRSC483084-4A	HPB4830	HEZD4830
		36	550	DRS483684-4S	DRS483684-4A	775	DRSC483684-4S	DRSC483684-4A	HPB4836	HEZD4836
		48	550	DRS484884-4S	DRS484884-4A	700	DRSC484884-4S	DRSC484884-4A	HPB4848	HEZD4848
48''	Heavy-Duty	18	750	DRH481884-4S	DRH481884-4A	1400	DRHC481884-4S	DRHC481884-4A	HPB4818	HEZD4818
	Angle	24	750	DRH482484-4S	DRH482484-4A	1400	DRHC482484-4S	DRHC482484-4A	HPB4824	HEZD4824
		30	750	DRH483084-4S	DRH483084-4A	1310	DRHC483084-4S	DRHC483084-4A	HPB4830	HEZD4830
		36	750	DRH483684-4S	DRH483684-4A	1220	DRHC483684-4S	DRHC483684-4A	HPB4836	HEZD4836
0011		48	750	DRH484884-4S	DRH484884-4A	1125	DRHC484884-4S	DRHC484884-4A	HPB4848	HEZD4848
60''	Heavy-Duty	18	600	DRH601884-4S	DRH601884-4A	1200	DRHC601884-4S	DRHC601884-4A DRHC602484-4A	HPB6018	HEZD6018
	Angle Beam	24 30	600 600	DRH602484-4S DRH603084-4S	DRH602484-4A DRH603084-4A	1200 1200	DRHC602484-4S DRHC603084-4S	DRHC602484-4A DRHC603084-4A	HPB6024 HPB6030	HEZD6024
		36	600	DRH603684-4S	DRH603684-4A	1200	DRHC603684-4S	DRHC603684-4A	HPB6036	HEZD6036
		48	600	DRH604884-4S	DRH604884-4A	1200	DRHC604884-4S	DRHC604884-4A	HPB6048	HEZD6048
60''	Channel	18	-	-	- DITTIOU4004-4A	2000	DRCC601884-4S	DRCC601884-4A	HPB6018	HEZD6018
00	Beam	24	-	-	-	2000	DRCC602484-4S	DRCC602484-4A	HPB6024	HEZD6024
	Douin	30	-	-	-	2000	DRCC603084-4S	DRCC603084-4A	HPB6030	HEZD6030
		36	-	-	-	2000	DRCC603684-4S	DRCC603684-4A	HPB6036	HEZD6036
		48	-	-	-	2000	DRCC604884-4S	DRCC604884-4A	HPB6048	HEZD6048
72''	Heavy-Duty	18	500	DRH721884-4S	DRH721884-4A	1000	DRHC721884-4S	DRHC721884-4A	HPB7218	HEZD7218
	Angle Beam	24	500	DRH722484-4S	DRH722484-4A	1000	DRHC722484-4S	DRHC722484-4A	HPB7224	HEZD7224
	J	30	500	DRH723084-4S	DRH723084-4A	1000	DRHC723084-4S	DRHC723084-4A	HPB7230	HEZD7230
		36	500	DRH723684-4S	DRH723684-4A	1000	DRHC723684-4S	DRHC723684-4A	HPB7236	HEZD7236
		48	500	DRH724884-4S	DRH724884-4A	1000	DRHC724884-4S	DRHC724884-4A	HPB7248	HEZD7248
72''	Channel	18	-	-	-	1850	DRCC721884-4S	DRCC721884-4A	HPB7218	HEZD7218
	Beam	24	-	-	-	1850	DRCC722484-4S	DRCC722484-4A	HPB7224	HEZD7224
		30	-	-	-	1850	DRCC723084-4S	DRCC723084-4A	HPB7230	HEZD7230
		36	-	-	-	1850	DRCC723684-4S	DRCC723684-4A	HPB7236	HEZD7236
		48	-	-	-	1850	DRCC724884-4S	DRCC724884-4A	HPB7248	HEZD7248
96''	Heavy-Duty	18	-	-	-	620	DRHC961884-4S	DRHC961884-4A	HPB9618	HEZD9618
	Angle Beam	24	-	-	-	620	DRHC962484-4S	DRHC962484-4A	HPB9624	HEZD9624
		30	-	-	-	620	DRHC963084-4S	DRHC963084-4A	HPB9630	HEZD9630
		36	-	-	-	620	DRHC963684-4S	DRHC963684-4A	HPB9636	HEZD9636
0011	01 1	48	-	-	-	620	DRHC964884-4S	DRHC964884-4A	HPB9648	HEZD9648
96''	Channel	18	-	-	-	1400	DRCC961884-4S	DRCC961884-4A	HPB9618	HEZD9618
	Beam	24	-	-	-	1400	DRCC962484-4S	DRCC962484-4A	HPB9624	HEZD9624
		30	-	-	-	1400	DRCC963084-4S	DRCC963084-4A	HPB9630	HEZD9630
		36 48	-	-	-	1400	DRCC963684-4S DRCC964884-4S	DRCC963684-4A DRCC964884-4A	HPB9636 HPB9648	HEZD9636 HEZD9648
		40	-	DOUBLE BU	/ET LINUTE 4	1400			HF D3040	ПЕДДЭ040
							GH WITH 5 LEV			
72''	Heavy-Duty	30	500	DRH7230120-5S	DRH7230120-5A	1000	DRHC7230120-5S	DRHC7230120-5A	HPB7230	HEZD7230
	Angle Beam	36	500	DRH7236120-5S	DRH7236120-5A	1000	DRHC7236120-5S	DRHC7236120-5A	HPB7236	HEZD7236
7011	Ol I	48	500	DRH7248120-5S	DRH7248120-5A	1000	DRHC7248120-5S	DRHC7248120-5A	HPB7248	HEZD7248
72''	Channel	30	-	-	-	1490	DRCC7230120-5S	DRCC7230120-5A	HPB7230	HEZD7230
	Beam	36	-	-	-	1490	DRCC7236120-5S	DRCC7236120-5A	HPB7236	HEZD7236
06''	Hoose Dite	48	-	-	-	1490	DRCC7248120-5S	DRCC7248120-5A	HPB7248	HEZD7248
96''	Heavy-Duty	30	-	-	-	620	DRHC9630120-5S	DRHC9630120-5A	HPB9630	HEZD9630
	Angle Beam	36		-	-	620	DRHC9636120-5S	DRHC9636120-5A	HPB9636	HEZD9636
96''	Channel	48	-	-	-	620	DRHC9648120-5S	DRHC9648120-5A	HPB9648	HEZD9648
90	Channel	30	-	-	-	1400	DRCC9630120-5S	DRCC9630120-5A	HPB9630	HEZD9630
	Beam	36	- 1	-	-	1400	DRCC9636120-5S	DRCC9636120-5A	HPB9636	HEZD9636

Starter units consist of four standard angle posts, *two left-to-right standard double rivet angle/channel beams per level and two front-to-back standard double rivet angle beams per level.

Adder units consist of two standard T-Posts, *two left-to-right standard double rivet angle/channel beams per level and two front-to-back standard double rivet angle beams per level. *Channel beam units are provided with left-to-right double rivet angle beams at bottom level.





BOLTLESS STEEL SHELVING

				REC	ORD STORAGE UN	IITS		
Width	Depth	Height	Levels	No. of boxes	Starter Model No.	Adder Model No.	Particle Board Decking	EZ-Deck Steel Decking
42''	15''	60''	3	18	RS421560-3S	RS421560-3A	HPB4215	HEZD4215
	30''	60''	3	36	RS423060-3S	RS423060-3A	HPB4230	HEZD4230
69''	15''	60''	3	30	RS691560-3S	RS691560-3A	HPB6915	HEZD6915
	30''	60''	3	60	RS693060-3S	RS693060-3A	HPB6930	HEZD6930
42''	15''	84''	4	24	RS421584-4S	RS421584-4A	HPB4215	HEZD4215
	30''	84''	4	48	RS423084-4S	RS423084-4A	HPB4230	HEZD4230
69''	15''	84''	4	40	RS691584-4S	RS691584-4A	HPB6915	HEZD6915
	30''	84''	4	80	RS693084-4S	RS693084-4A	HPB6930	HEZD6930
42''	15''	108''	5	30	RS4215108-5S	RS4215108-5A	HPB4215	HEZD4215
	30''	108''	5	60	RS4230108-5S	RS4230108-5A	HPB4230	HEZD4230
69''	15''	108''	5	50	RS6915108-5S	RS6915108-5A	HPB6915	HEZD6915
	30''	108''	5	100	RS6930108-5S	RS6930108-5A	HPB6930	HEZD6930

Be sure to order one each of particle board or EZ-Deck steel decking per level. The above units do not include record storage boxes.



Access Unit From Front or Back!



Record Storage Unit with 4 levels (80 Box unit)









PARTICLE BOARD, WIRE DECK & E-Z DECK CAPACITY RATINGS

Recommended safe use load table for 5/8" particle board and EZ-Deck steel decking allowable uniformly distributed static live loads for deck material

			2 SIDES S	UPPORTED	4 SIDES S	UPPORTED		+ CENTER Orted	4 SIDES + SUPPO	
Size (inches) W x D	Particle Board Decking	EZ-Deck Steel Decking	LOAD (lbs.)	DEFL (ins)	LOAD (lbs.)	DEFL (ins)	LOAD (lbs.)	DEFL (ins)	LOAD (lbs.)	DEFL (ins)
36x12	HPB3612	HEZD3612	425	0.06	675	0.08				
36x18	HPB3618	HEZD3618	400	0.17	550	0.18				
36x24	HPB3624	HEZD3624	305	0.30	435	0.23				
36x30	HPB3630	HEZD3630	250	0.47	385	0.32				
36x36	HPB3636	HEZD3636	150	0.50	180	0.39				
42x12	HPB4212	HEZD4212	490	0.06	755	0.08				
42x18	HPB4218	HEZD4218	460	0.17	600	0.18				
42x24	HPB4224	HEZD4224	355	0.30	500	0.29				
42x30	HPB4230	HEZD4230	300	0.47	410	0.36				
42x36	HPB4236	HEZD4236	175	0.50	385	0.45				
48x12	HPB4812	HEZD4812	560	0.06	850	0.08	1160	0.08		
48x18	HPB4818	HEZD4818	525	0.17	635	0.18	770	0.10		
48x24	HPB4824	HEZD4824	405	0.30	530	0.30	700	0.11		
48x30	HPB4830	HEZD4830	325	0.47	440	0.40	705	0.12		
48x36	HPB4836	HEZD4836	200	0.50	400	0.50	755	0.12		
48x48	HPB4848	HEZD4848	85	0.50	275	0.50	920	0.13		
60x18	HPB6018	HEZD6018	660	0.17	735	0.18	835	0.12	1140	0.08
60x24	HPB6024	HEZD6024	505	0.30	615	0.32	700	0.15	1180	0.10
60x30	HPB6030	HEZD6030	410	0.47	520	0.46	650	0.16	1324	0.11
60x36	HPB6036	HEZD6036	250	0.50	380	0.50	665	0.17	1520	0.12
60x48	HPB6048	HEZD6048	105	0.50	230	0.50	750	0.18	2000	0.14
69x15	HPB6915	HEZD6915	900	0.11	950	0.12	1150	0.12	1250	0.11
69x30	HPB6930	HEZD6930	470	0.50	600	0.50	670	0.20	1220	0.13
72x18	HPB7218	HEZD7218	800	0.17	850	0.17	1000	0.15	1200	0.10
72x24	HPB7224	HEZD7224	605	0.30	680	0.31	770	0.19	1135	0.12
72x30	HPB7230	HEZD7230	500	0.47	610	0.50	680	0.21	1200	0.14
72x36	HPB7236	HEZD7236	300	0.50	390	0.50	655	0.23	1325	0.16
72x48	HPB7248	HEZD7248	130	0.50	215	0.50	685	0.25	1670	0.18
84x24	HPB8424	HEZD8424	705	0.30	765	0.31	870	0.23	1150	0.15
84x30	HPB8430	HEZD8430	570	0.47	650	0.49	735	0.27	1150	0.18
84x36	HPB8436	HEZD8436	355	0.50	415	0.50	670	0.29	1210	0.20
84x48	HPB8448	HEZD8448	150	0.50	215	0.50	660	0.33	1460	0.23
96x18	HPB9618	HEZD9618	1050	0.17	1115	0.17	1300	0.18	1500	0.15
96x24	HPB9624	HEZD9624	810	0.30	850	0.31	1000	0.26	1200	0.18
96x30	HPB9630	HEZD9630	655	0.47	710	0.49	800	0.32	1180	0.20
96x36	HPB9636	HEZD9636	405	0.50	450	0.50	710	0.36	1150	0.24
96x48	HPB9648	HEZD9648	170	0.50	200	0.50	650	0.41	1325	0.28

Wire Decking	Size (inches) W x D	Wire Supports	Capacity (lbs)	
HWD3618	36" x 18"	4	725	
HWD3624	36" x 24"	4	605	
HWD3630	36" x 30"	4	485	
HWD3636	36" x 36"	4	455	
HWD3648	36" x 48"	4	300	
HWD4818	48" x 18"	5	725	
HWD4824	48" x 24"	5	605	
HWD4830	48" x 30"	5	485	
HWD4836	48" x 36"	5	455	
HWD4848	48" x 48"	5	300	
HWD6018	60" x 18"	6	725	
HWD6024	60" x 24"	6	605	
HWD6030	60" x 30"	6	485	
HWD6036	60" x 36"	6	455	
HWD6048	60" x 48"	6	300	

All wire decks are powder coated gray.

All sizes measure 1/8" short of nominal dimension in both directions.


NOTE: The above load chart refers to the deck materials only. Particle board decking is 5/8" industrial grade type 1-M-2.

EZ-Deck steel decking is 22 gauge galvanized sheet steel fabricated in 6" deep channel planks (models listed above include multiple planks to meet unit depth).

15" deep Ez-Deck will be shipped in two (2) 7 1/2" deep planks. The allowable shelf load capacity may be reduced due to allowable post and / or beam capacities. Specific deflection limits may also reduce the shelf load capacity.

NOTE: EZ-Deck must be center supported on units 48" wide and wider.

EZ-Deck steel decking can NOT be used on single rivet units.

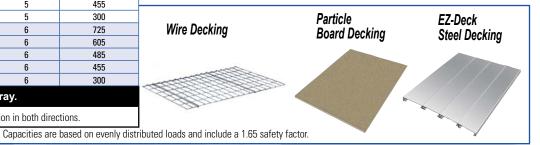



QUICKSHIP

TIRE STORAGE RACKS										
Width	Depth	Height	Levels	*Tire Capacity	Starter Model No.	Adder Model No.				
SINGLE ROW										
60''	21''	84''	3	24	TSS602184-3S	TSS602184-3A				
	21''	120''	4	32 TSS6021120-4S		TSS6021120-4A				
	21''	144''	5	40	TSS6021144-5S	TSS6021144-5A				
			DOU	BLE ROW						
60''	21''	84''	3	48	TSD602184-3S	TSD602184-3A				
	21''	120''	4	64	TSD6021120-4S	TSD6021120-4A				
21" 144" 5 80 TSD6021144-5S			TSD6021144-5A							

9"

Tire Storage Rack


(*)Based on average passenger tire (**) Supplied with heavy-duty posts

NOTE: 144" high units are supplied with two 6' posts spliced to achieve 12' height. 192" high units are supplied with two 8' posts spliced to achieve 16' height. For additional configurations, please contact our inside sales department.

	MUFFLER S		Particle Decl				
Width	Depth	Height	Levels	Starter Model No.	Adder Model No.	Size	Part No.
48''	36''	84''	5	MS483684-5S	MS483684-5A	48'' X 36''	HPB4836
96''	36''	84''	5	MS963684-5S	MS963684-5A	96'' X 36''	HPB9636

Be sure to order one each of particle board decking per level.

НА	HANGING TAILPIPE RACK									
Width	Depth	Height	Starter Model No.							
48''	18''	120''	HTP4818120							
96''	18''	120''	HTP9618120							

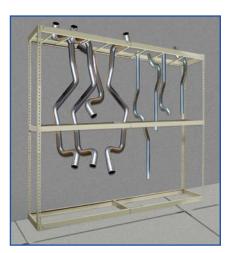

Hanging Tailpipe Rack



Tire Rack







Muffler Storage Rack







COMMERCIAL KD CABINETS



2) YEAR WARRANTY KDJASSEMBLY

Functional Durable Adaptable



Stationary Combination Shown with Solid Doors



Mobile Storage Shown with Ventilated Doors



Stationary Wardrobe Shown with Safety-View Doors





Wall Mount

CONFIGURATIONS:

- Wall Mount.
- Storage (includes 4 adjustable shelves).
- Wardrobe (includes 1 shelf and coat rod).
- Combination (includes 1 full width shelf, 3 half width shelves and a half width coat rod).

DOOR OPTIONS:

- Solid.
- Safety-View (includes polycarbonate panels in door).
- Ventilated (includes expanded metal panels in door).



GENERAL SPECIFICATIONS

- All components precision engineered with no bolt heads showing on front and side panels.
- Body and shelves fabricated from 22 gauge steel.
- Shelves easily adjust up or down in 2" increments. Triple flanged shelf front for added strength (capacity up to 200 lbs).
- Reinforced doors swing a full 180°.
- Doors are factory-hung in 16 gauge frames ensuring proper performance.
- 16 gauge continuous hinges.

- Corner foot gussets provide added rigidity and stability (replaced by mounting plates on mobile units).
- Mobile units include four heavy-duty locking swivel casters.
- Positive three-point locking (top, center and bottom) for secure locking (single cam only for 16" wide wall-mount cabinets).
- Plated locking handle has built-in cylinder key lock (keys included).







COMMERCIAL KD CABINETS

Description	Width	Depth	Height	Knock-Down Cat No.	Assembled Cat No.	Color Selection
SOLID DOOR CABINETS						
Vall Mount, Storage	16	12	26	405-1626	405-1626A	ME, HG, PT
Wall Mount, Storage	30	12	26	405-3026	405-3026A	ME, HG, PT
Wall Mount, Storage	36	12	30	405-3630	405-3630A	ME, HG, PT
Slimline, Storage	18	18	42	410S181842	410S181842A	PT
Slimline, Storage	18	18	66	410S181866	410S181866A	PT
Slimline, Storage	30	15	66	410S301566	410S301566A	PT
Stationary, Storage	36	18	72	415S18	415S18A	ME, HG, PT
Stationary, Storage	36	24	72	415S24	415S24A	ME, HG, PT
Stationary, Storage	48	18	72	425S18	425S18A	ME, HG, PT
Stationary, Storage	48	24	72	425S24	425S24A	ME, HG, PT
Stationary, Wardrobe	36	18	72	435W18	435W18A	ME, HG, PT
Stationary, Wardrobe	36	24	72	435W24	435W24A	ME, HG, PT
Stationary, Wardrobe	48	18	72	445W18	445W18A	ME, HG, PT
Stationary, Wardrobe	48	24	72	445W24	445W24A	ME, HG, PT
Stationary, Combination	36	18	72	455C18	455C18A	ME, HG, PT
Stationary, Combination	36	24	72	455C24	455C24A	ME, HG, PT
Stationary, Combination	48	18	72	465C18	465C18A	ME, HG, PT
Stationary, Combination	48	24	72	465C24	465C24A	ME, HG, PT
Mobile, Storage	36	24	72	415S24M	415S24MA	ME, HG, PT
Mobile, Storage	48	24	72	425S24M	425S24MA	ME, HG, PT
SAFETY VIEW DOOR CABIN		24	12	423324IVI	423024WA	IVIL, IIU, I I
Vall Mount, Storage	16	12	26	405-1626SV	405-1626SVA	ME, HG, PT
Vall Mount, Storage	30	12	26		405-3026SVA	ME, HG, PT
Vall Mount, Storage	36	12	30	405-3026SV 405-3630SV	405-30265VA 405-3630SVA	ME, HG, PT
tationary, Storage	36	18	72			ME, HG, PT
tationary, Storage	36	24	72	415S18SV	415S18SVA	ME, HG, PT
tationary, Storage	48	18	72	415S24SV	415S24SVA	ME, HG, PT
tationary, Storage	48	24	72	425S18SV	425S18SVA	ME, HG, PT
	36	18	72	425S24SV	425S24SVA	
tationary, Wardrobe	36	24	72	435W18SV	435W18SVA	ME, HG, PT
Stationary, Wardrobe	48	18	72	435W24SV	435W24SVA	ME, HG, PT ME, HG, PT
Stationary, Wardrobe	48	24	72	445W18SV	445W18SVA	
Stationary, Wardrobe				445W24SV	445W24SVA	ME, HG, PT
Stationary, Combination Stationary, Combination	36 36	18 24	72 72	455C18SV	455C18SVA	ME, HG, PT
Stationary, Combination Stationary, Combination	36 48	24 18	72	455C24SV	455C24SVA	ME, HG, PT
• •				465C18SV	465C18SVA	ME, HG, PT
Stationary, Combination	48	24	72	465C24SV	465C24SVA	ME, HG, PT
Mobile, Storage	36	24	72	415S24SVM	415S24SVMA	ME, HG, PT
Mobile, Storage	48	24	72	425S24SVM	425S24SVMA	ME, HG, PT
/ENTILATED DOOR CABINE		10	70	445040514	44504051/4	ME US ST
Stationary, Storage	36	18	72	415S18EV	415S18EVA	ME, HG, PT
Stationary, Storage	36	24	72	415S24EV	415S24EVA	ME, HG, PT
Stationary, Storage	48	18	72	425S18EV	425S18EVA	ME, HG, PT
Stationary, Storage	48	24	72	425S24EV	425S24EVA	ME, HG, PT
tationary, Wardrobe	36	18	72	435W18EV	435W18EVA	ME, HG, PT
Stationary, Wardrobe	36	24	72	435W24EV	435W24EVA	ME, HG, PT
Stationary, Wardrobe	48	18	72	445W18EV	445W18EVA	ME, HG, PT
Stationary, Wardrobe	48	24	72	445W24EV	445W24EVA	ME, HG, PT
Stationary, Combination	36	18	72	455C18EV	455C18EVA	ME, HG, PT
Stationary, Combination	36	24	72	455C24EV	455C24EVA	ME, HG, PT
Stationary, Combination	48	18	72	465C18EV	465C18EVA	ME, HG, PT
Stationary, Combination	48	24	72	465C24EV	465C24EVA	ME, HG, PT
Nobile, Storage	36	24	72	415S24EVM	415S24EVMA	ME, HG, PT
Mobile, Storage	48	24	72	425S24EVM	425S24EVMA	ME, HG, PT















INDUSTRIAL STRENGTH STEEL CABINETS



2 YEAR MORK DOWN WORK DOWN

Industrial Strength Storage



Stationary Wardrobe Shown with Solid Doors



Mobile Storage Shown with Safety-View Doors



Stationary Wardrobe Shown with Ventilated Doors



Stationary Combination Shown with Safety-View Doors

CONFIGURATIONS:

- Storage (includes 4 adjustable shelves).
- Wardrobe (includes 1 shelf and coat rod).
- Combination (includes 1 full width shelf, 3 half width shelves and a half width coat rod).

DOOR OPTIONS:

- Solid.
- Safety-View (includes polycarbonate panels in door)
- Ventilated (includes expanded metal panels in door)



GENERAL SPECIFICATIONS

- All components precision engineered with nobolt heads showing on front and side panels.
- 20 gauge body and 22 gauge shelves provide strength and durability.
- Shelves easily adjust up or down in 2" increments. Triple flanged shelf front for added strength (capacity up to 250 lbs).
- Reinforced doors swing a full 180°.
- Doors are factory-hung in 16 gauge frames ensuring proper performance.

- 16 gauge continuous hinges.
- Corner foot gussets provide added rigidity and stability (replaced by mounting plates on mobile units).
- Mobile units include four heavy-duty locking swivel casters.
- Positive three-point locking (top, center and bottom) for secure locking.
- Plated locking handle has built-in cylinder key lock (keys included).







800 SERIES INDUSTRIAL STRENGTH STEEL CABINETS

Provides maximum protection to tools, dies, delicate instruments, supplies, and personal belongings.

Designed to meet government requirements.

Description	Width	Depth	Height	Knock-Down Cat No.	Assembled Cat No.	Color Selection
<u> </u>			- 5			
SOLID DOOR CABINETS	20	10	70	015010	0150104	ME DE DI AM
Stationary, Storage	36	18	78	815\$18	815S18A	ME, PT, PL-AM
Stationary, Storage	36	24	78	815S24	815S24A	ME, PT, PL-AM
Stationary, Storage	48	18	78	825S18	825S18A	ME, PT, PL-AM
Stationary, Storage	48	24	78	825S24	825S24A	ME, PT, PL-AM
Stationary, Wardrobe	36	18	78	835W18	835W18A	ME, PT, PL-AM
Stationary, Wardrobe	36	24	78	835W24	835W24A	ME, PT, PL-AM
Stationary, Wardrobe	48	18	78	845W18	845W18A	ME, PT, PL-AM
Stationary, Wardrobe	48	24	78	845W24	845W24A	ME, PT, PL-AM
Stationary, Combination	36	18	78	855C18	855C18A	ME, PT, PL-AM
Stationary, Combination	36	24	78	855C24	855C24A	ME, PT, PL-AM
Stationary, Combination	48	18	78	865C18	865C18A	ME, PT, PL-AM
Stationary, Combination	48	24	78	865C24	865C24A	ME, PT, PL-AM
Mobile, Storage	36	24	78	815S24M	815S24MA	ME, PT, PL-AM
Mobile, Storage	48	24	78	825S24M	825S24MA	ME, PT, PL-AM
SAFETY VIEW DOOR CABI						
Stationary, Storage	36	18	78	815S18SV	815S18SVA	ME, PT, PL-AM
Stationary, Storage	36	24	78	815S24SV	815S24SVA	ME, PT, PL-AM
Stationary, Storage	48	18	78	825S18SV	825S18SVA	ME, PT, PL-AM
Stationary, Storage	48	24	78	825S24SV	825S24SVA	ME, PT, PL-AM
Stationary, Wardrobe	36	18	78	835W18SV	835W18SVA	ME, PT, PL-AM
Stationary, Wardrobe	36	24	78	835W24SV	835W24SVA	ME, PT, PL-AM
Stationary, Wardrobe	48	18	78	845W18SV	845W18SVA	ME, PT, PL-AM
Stationary, Wardrobe	48	24	78	845W24SV	845W24SVA	ME, PT, PL-AM
Stationary, Combination	36	18	78	855C18SV	855C18SVA	ME, PT, PL-AM
Stationary, Combination	36	24	78	855C24SV	855C24SVA	ME, PT, PL-AM
Stationary, Combination	48	18	78	865C18SV	865C18SVA	ME, PT, PL-AM
Stationary, Combination	48	24	78	865C24SV	865C24SVA	ME, PT, PL-AM
Mobile, Storage	36	24	78	815S24SVM	815S24SVMA	ME, PT, PL-AM
Mobile, Storage	48	24	78	825S24SVM	825S24SVMA	ME, PT, PL-AM
VENTILATED DOOR CABIN	IETS					
Stationary, Storage	36	18	78	815S18EV	815S18EVA	ME, PT, PL-AM
Stationary, Storage	36	24	78	815S24EV	815S24EVA	ME, PT, PL-AM
Stationary, Storage	48	18	78	825S18EV	825S18EVA	ME, PT, PL-AM
Stationary, Storage	48	24	78	825S24EV	825S24EVA	ME, PT, PL-AM
Stationary, Wardrobe	36	18	78	835W18EV	835W18EVA	ME, PT, PL-AM
Stationary, Wardrobe	36	24	78	835W24EV	835W24EVA	ME, PT, PL-AM
Stationary, Wardrobe	48	18	78	845W18EV	845W18EVA	ME, PT, PL-AM
Stationary, Wardrobe	48	24	78	845W24EV	845W24EVA	ME, PT, PL-AM
Stationary, Combination	36	18	78	855C18EV	855C18EVA	ME, PT, PL-AM
Stationary, Combination	36	24	78	855C24EV	855C24EVA	ME, PT, PL-AM
Stationary, Combination	48	18	78	865C18EV	865C18EVA	ME, PT, PL-AM
Stationary, Combination	48	24	78	865C24EV	865C24EVA	ME, PT, PL-AM
Mobile, Storage	36	24	78	815S24EVM	815S24EVMA	ME, PT, PL-AM
Mobile, Storage	48	24	78	825S24EVM	825S24EVMA	ME, PT, PL-AM









Order your cabinets in our specially formulated Antimicrobial powder coat finish that protects against bacteria, mold & yeast for up to 20 years!









CLASSIC AND GALVANITE™ SERIES ALL-WELDED CABINETS

For Really Tough Industrial Applications





Storage Cabinet

16 gauge Classic & Galvanite™

14 gauge Classic & Galvanite™

12 gauge Classic & Galvanite™

Combination Cabinet

16 gauge Classic & Galvanite™

14 gauge Classic & Galvanite™

12 gauge Classic & Galvanite™

GENERAL SPECIFICATIONS

CLASSIC SERIES CABINETS are fabricated from prime grade cold rolled sheet steel.

GALVANITE SERIES CABINETS are fabricated from galvannealed sheet steel which has a zinc-iron alloy coating that is applied at the mill providing protection against high-humidity and moist environments. This coating also prevents corrosion from spreading when the paint and/or coating is scratched away.

HEAVY-DUTY CABINETS are 16 gauge with 16 gauge shelves

EXTRA HEAVY-DUTY CABINETS are 14 gauge with14 gauge shelves

SUPER-DUTY CABINETS are 12 gauge with 14 gauge shelves

SAFETY-VIEW® SERIES CABINETS incorporate polycarbonate panels in both doors of our extra heavy-duty 14 gauge Classic Series cabinets allowing contents to be visible without compromising security.

VENTILATED SERIES CABINETS are fabricated to the same rugged standards as our extra heavy-duty 14 gauge Classic Series cabinets with the added benefit of being fully ventilated with diamond perforated doors and sides and a 13 gauge flattened expanded metal back.







CLASSIC AND GALVANITE™ SERIES ALL-WELDED CABINETS



All the rugged standard features of our popular Classic Series DuraTough cabinets with the added strength and security of 12 gauge sides and doors.



Safety-View Cabinet 14 gauge Classic



Ventilated Cabinet 14 gauge Classic



18-gauge full-height door stiffener provides maximum rigidity to both doors



Heavy-Duty 3/16" thick steel handle with padlock hasp



1/8" thick latch and 3/8" diameter lock rods insure maximum security

GREENGUARD GOLD GERTIFIED

STANDARD FEATURES FOR ALL DURATOUGH™ CLASSIC AND GALVANITE™ SERIES CABINETS

- All-welded construction
- Double door design
- Solid doors are reinforced with an 18 gauge full-height door stiffener providing a rigid torque-free door.
- 3-point turn handle locking using 3/8" diameter locking rods operated by a 3/16" gauge steel handle. Handle is painted to match cabinet.
- Heavy-duty 13 gauge 7-knuckle 3-1/2" butt hinges welded to door and securely riveted to frame.
- Solid sides are formed to be integral with vertical door frame.
- Top is formed to be integral with horizontal top door frame.
- Bottom is formed to be integral with horizontal bottom door frame and includes double return bends at all four sides maximizing unit rigidity.

- Back is welded to cabinet top, bottom and sides
- Shelves are formed to provide maximum capacity and areadjustable on 3" centers. Shelves bolt to shelf support channels which are welded to sides.
- 78" high storage cabinets include 4-adjustable shelves
- 60" high storage cabinets include 3-adjustable shelves
- 42" high storage cabinets include 2-adjustable shelves
- 78" high combination cabinets include one full-width upper shelf, a center partition, 3 partial-width shelves and one partial-width coat rod
- Optional leg kits are available and can be bolted on to all DuraTough cabinets.
- Color: 738 Charcoal





CLASSIC AND GALVANITE™ ALL-WELDED CABINETS

DUR	ATOUGH™	CLASS	IC SERI	ES				
Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	No. of Shelves			
16 GAUGE HEAVY-DU	TY							
HW6SC6142-2	Storage	36	21	42	2			
HW6SC6160-3	Storage	36	21	60	3			
HW6SC6178-4	Storage	36	21	78	4			
HW6SC6478-4	Storage	36	24	78	4			
HW6SC8460-3	Storage	48	24	60	3			
HW6SC8478-4	Storage	48	24	78	4			
HW6SC0478-4	Storage	60	24	78	4			
HW6CC6478-4	Combination	36	24	78	4			
HW6CC8478-4	Combination	48	24	78	4			
HW6CC0478-4	Combination	60	24	78	4			
14 GAUGE EXTRA HEAVY-DUTY								
HW4SC6142-2	Storage	36	21	42	2			
HW4SC6160-3	Storage	36	21	60	3			
HW4SC6178-4	Storage	36	21	78	4			
HW4SC6478-4	Storage	36	24	78	4			
HW4SC8460-3	Storage	48	24	60	3			
HW4SC8478-4	Storage	48	24	78	4			
HW4SC0478-4	Storage	60	24	78	4			
HW4CC6478-4	Combination	36	24	78	4			
HW4CC8478-4	Combination	48	24	78	4			
HW4CC0478-4	Combination	60	24	78	4			
44 CALICE VENTUATE	n							
14 GAUGE VENTILATE		00		70				
HW4VSC6478-4 HW4VSC8478-4	Storage Storage	36 48	24 24	78 78	4 4			
14 GAUGE SAFETY-VII	•				•			
HW4SVSC6478-4	Storage	36	24	78	4			
HW4SVSC8478-4	Storage	48	24	78	4			
12 GAUGE SUPER-DU	•							
HW2SC6478-4	Storage	36	24	78	4			
HW2SC8478-4	Storage	48	24	78	4			
HW2SC0478-4	Storage	60	24	78	4			
HW2CC6478-4	Combination	36	24	78	4			
HW2CC8478-4	Combination	48	24	78	4			
HW2CC0478-4	Combination	60	24	78	4			

DUR	ATOUGH™ G	ALVAN	ITE SEI	RIES	
Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	No. of Shelves
HEAVY-DUTY-16 GAL	IGE				
HWG6SC6142-2	Storage	36	21	42	2
HWG6SC6160-3	Storage	36	21	60	3
HWG6SC6178-4	Storage	36	21	78	4
HWG6SC6478-4	Storage	36	24	78	4
HWG6SC8460-3	Storage	48	24	60	3
HWG6SC8478-4	Storage	48	24	78	4
HWG6SC0478-4	Storage	60	24	78	4
HWG6CC6478-4	Combination	36	24	78	4
HWG6CC8478-4	Combination	48	24	78	4
HWG6CC0478-4	Combination	60	24	78	4
EXTRA HEAVY-DUTY	-14 GAUGE				
HWG4SC6142-2	Storage	36	21	42	2
HWG4SC6160-3	Storage	36	21	60	3
HWG4SC6178-4	Storage	36	21	78	4
HWG4SC6478-4	Storage	36	24	78	4
HWG4SC8460-3	Storage	48	24	60	3
HWG4SC8478-4	Storage	48	24	78	4
HWG4SC0478-4	Storage	60	24	78	4
HWG4CC6478-4	Combination	36	24	78	4
HWG4CC8478-4	Combination	48	24	78	4
HWG4CC0478-4	Combination	60	24	78	4










SUPER-DUTY 12 GAUGE ALL-WELDED CABINETS


DURATOUGH™ CABINET LEG KITS Width Depth Height Legs Per **Catalog Number** Туре (In) (In) (In) Kit **HWC4LK-1G-HG** 4 21 4 2 Leg Kit **HWC4LK-4G-HG** 2 Leg Kit 4 24 4

Leg kits can be added to any Hallowell DuraTough Cabinet. Legs are fabricated from galvanneal corrosion resistant steel and are easily bolted to cabinet bottom. Includes hardware for field attachment.

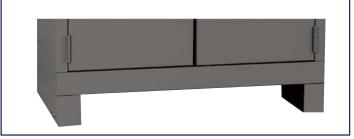

DURATOUGH™ CABINET DRAWERS					
Catalog Number	Туре	Width (In)	Depth (In)	Drawer Height	
FKSCD36-2CL	2 Drawer	36	24	7.5	
FKSCD48-2CL	2 Drawer	48	24	7.5	
FKSCD36-3CL	3 Drawer	36	24	5	
FKSCD48-3CL	3 Drawer	48	24	5	

Note: Drawer units should always be installed into the lower portion of the cabinets to insure stability when opening the drawers. *Only one drawer should be opened at a time*.

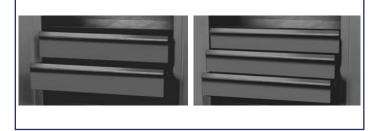

Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	No. of Shelves
ADDITIONAL SHELVES,	FOR HEAVY-	DUTY CABI	NETS		
HW6SCS61	Shelf	36	21		1
HW6SCS64	Shelf	36	24		1
HW6SCS84	Shelf	48	24		1
ADDITIONAL SHELVES,	FOR EXTRA	HEAVY-DUT	Y & SUPE	R DUTY C	ABINETS
HW4SCS61	Shelf	36	21		1
HW4SCS64	Shelf	36	24		1
HW4SCS84	Shelf	48	24		1

Catalog Number	Туре	Width (In)	Depth (In)	Height (In)	No. of Shelves
ADDITIONAL SHELVES,	FOR HEAVY-	DUTY CABI	NETS		
HWG6SCS61	Shelf	36	21		1
HWG6SCS64	Shelf	36	24		1
HWG6SCS84	Shelf	48	24		1
ADDITIONAL SHELVES,	FOR EXTRA I	HEAVY-DUT	Y & SUPE	R DUTY C	ABINETS
HWG4SCS61	Shelf	36	21		1
HWG4SCS64	Shelf	36	24		1
HWG4SCS84	Shelf	48	24		1





24 Designer Powder Coat Finishes for Metal Lockers

Now Available in Standard, Hammertone and Antimicrobial Finishes



NOTE: All body components of production KD lockers will be painted our standard neutral color, currently 729 Tan (choice of 729 Tan or 725 Dark Gray for HDV body).

Enhance your decor with two-tone color combinations, doors one color and frame a second color, AT NO ADDITIONAL COST.

HAMMERTONE FINISHES

Specially formulated with a unique hammer texture that is tough, highly durable and provides long lasting protection.

Note: Patterns/colors of textures and metallics will vary due to their nature. No touch up available for hammertone finishes.



Available for all 24 standard colors



Available for all standard 24 colors

Our MedSafe™ antimicrobial finishes with Microban® are specially formulated to protect against bacteria, mold, yeast & mildew for up to 20 years! Very beneficial for educational, healthcare, food processing and other hygiene conscious environments.

Colors shown are an approximate printed representation of the actual color and will vary depending on light source. Actual color samples are available upon request. List Industries reserves the right to modify its designs and/or make changes in specifications or colors without prior notice.







VersaMax[™] lockers use Wilsonart[®] engineered surfaces, a world leading manufacturer of phenolic products.

18 DESIGNER COLORS

VM-D381-60 FASHION GREY **KENSINGTON MAPLE** TITANIUM EV ORANGE GROVE VM-4811-60 SILICON EV VM-7061-60 **NATURAL PEAR** VM-D307-60 HOLLYBERRY TUNGSTEN EV STOCK COLOR VM-D91-60 SLATE GREY VM-4813-60 NICKEL EV **HUNTINGTON MAPLE** VM-D417-60 LAPIS BLUE VM-7054-60 WILD CHERRY VM-4820-60 CARBON EV VM-D379-60 VM-4623-60 GRAPHITE NEBULA VM-7989-60 PERSIAN CHERRY





Colors shown are an approximate representation of the actual color. Please do not make your final color selection from printed media or Internet images, as they may not be 100% accurate. For a more accurate color selection call 800-776-1342 or e-mail us at info@ListIndustries.com to request actual color samples.







CLASSIC KD Wardrobe & Box Lockers



BLACK TIE **Commercial Lockers**



STEEL Wardrobe & Box Lockers



SAFETY-VIEW® Wardrobe Lockers



SAFETY-VIEW® **PLUS Box Lockers Electronic Box Lockers**



MEDSAFETM SAFETY-VIEW® Antimicrobial Lockers







READYBUILT™ & READYBUILT™ II Ready-To-Go Lockers





CUBIX™ Modular Box Lockers

Our unparalleled array of stock lockers guarantees you getting the locker you need, whether it is plastic, wood or metal, box or wardrobe, high performance or emergency response, open-front or high security, we have the right locker for you

Order from stock and save time and money. Our distribution network, comprised of six (6) strategically located, full service, company owned and operated distribution centers, allows us to ship your order fast and secure. Our products are packaged above industry standards to safeguard your lockers, making sure they arrive in perfect condition.

We have been providing the quality you demand, the timeliness you require and the service you deserve for over 80 years.



PE/GYM All-Welded Ventilated Lockers

To see a complete list of stock lockers, visit our website:

www.ListIndustries.com





REE QUIETTM High Visibility Lockers













Prestigious

Wood Lockers



HYBRID Wood & Metal Lockers



TA-50 Ventilated Gear Lockers



RECRUITER™ **Open-Front Wood** . Sport Lockers



TURNOUT GEAR All-Welded Firefighter Lockers







GALVANITE™ Corrosion Resistant Ventilated Charger

Lockers

LAPTOP/ **BACKPACK**

Lockers



TABLET Mobile Device Lockers

QUICK-SHIP BENEFITS

Ventilated Lockers

- No Setup Charges
- No Minimum Order Quantity
- **Industry's Best Discount**

ADVANTAGES OF SIX **DISTRIBUTION CENTERS**

- ✓ Reduces Freight Cost
- Reduces Transit Time
- Minimizes Carrier Handling



Home Lockers







LOCKS Hallowell Electronic & Master Builtin Combo & Key, Master Padlock

Distribution Centers Nationwide REGIONAL DISTRIBUTION REGIONAL 4 **CENTER** DISTRIBUTION MECHANICSBURG.PA CENTER REGIONAL DAYTON, OH DISTRIBUTION CENTER REGIONAL RANCHO GUCAMONGA, CA DISTRIBUTION CENTER MEMPHIS, TN **MANUFACTURING & NATIONAL** REGIONAL DISTRIBUTION DISTRIBUTION **CENTER** MANUFACTURING **CENTER** APOPKA, FL **FACILITY** CARROLLTON, TX GAINSVILLE, FL MANUFACTURING **HEADQUARTERS** DEERFIELD BEACH, FL



BSL Bulk Storage Lockers



TASKFORCE XPTM **Emergency Response** Lockers



BENCHES & PEDESTALS Steel Adjustable, Stainless steel, Cast Iron Extra Heavy-Duty, Steel, Movable Aluminum



VERSAMAX™ Phenolic Lockers



AQUAMAX[™] **HDPE Plastic Lockers**

MEDSAFE™ AQUAMAX™ **HDPE Antimicrobial Lockers**

AMERICA'S MOST COMPLETE LOCKER LINE®

FULL LINE CATALOG

1-800-776-1342

ListIndustries.com



401 JIM MORAN BLVD., DEERFIELD BEACH, FL 33442

